

RoHS Compliant

Specifications:

Material And Finish:
Insulator: PA66 UL94V-0
Color: Natural

Rating:

Current Rating: 1.0 Amp
Voltage Rating: 125V AC/DC
Operating Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Electrical:






Contact resistance: 20m Ohm Max
Insulator resistance: 100M ohm min.
Withstanding Voltage: 500V AC/Minute

Ordering Information

H1253-XXP-A

1 2 3

1: —Series No.
2: —No. of Positions
3: —Bag

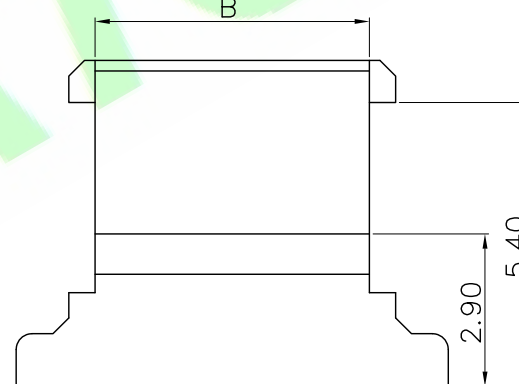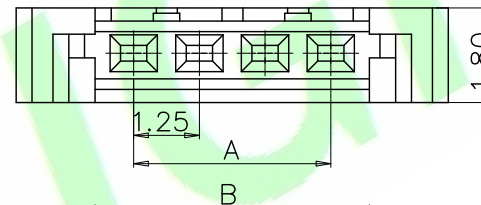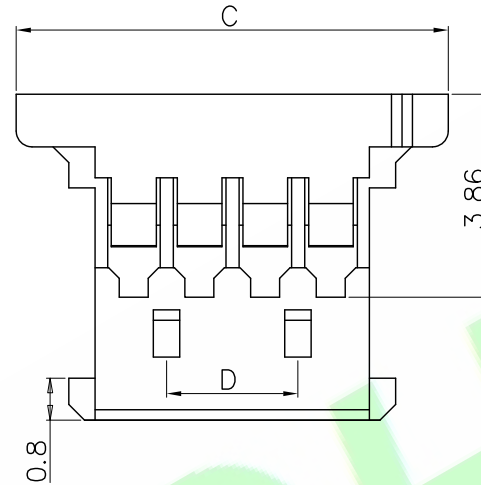

Poles	Dimensions(mm)			
	A	B	C	D
02	1.25	2.72	5.72	
03	2.50	3.97	6.97	
04	3.75	5.22	8.22	2.50
05	5.00	6.47	9.47	3.75
06	6.25	7.72	10.72	5.00
07	7.50	8.97	11.97	6.25
08	8.75	10.22	13.22	7.50
09	10.00	11.47	14.47	8.75
10	11.25	12.72	15.72	10.00
11	12.5	13.97	16.97	11.25
12	13.75	15.22	18.22	12.50
14	16.25	17.72	20.72	15.00
15	17.50	18.97	21.97	16.25
20	23.75	25.22	28.22	22.50
30	36.25	37.72	40.72	22.50

5X			
4X			
3X			
2X	Update the description	Judyyan	20220712
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Bruce
CHKD.: Aaron
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.25	X': ±5.0°
X.X: ±0.13	X.X': ±3.0°
X.XX: ±0.05	X.XX': ±2.0°
X.XXX: ±0.05	X.XXX': ±1.0°

PART NO : H1253-XXP-A

DWG. NO.:

TITLE :

1.25 mm Crimp Style Commctctors


DATE: 10-Oct-2017

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4