
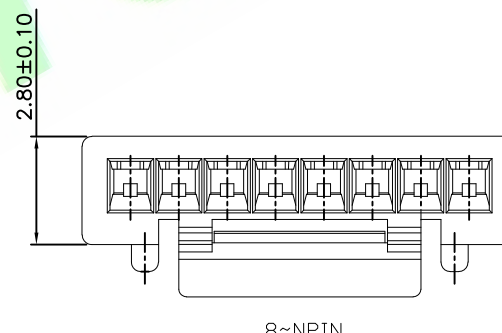


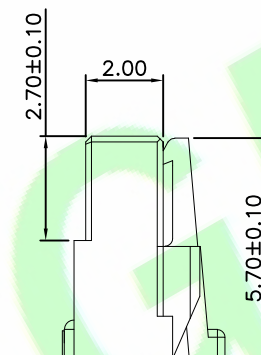
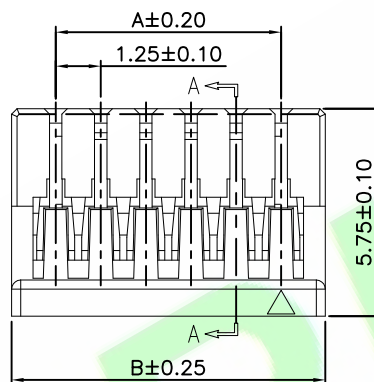




Specifications:
Material And Finish:
Insulator:PA66 UL94V-0 Color:White

Rating:
Current Rating:1.0 Amp
Voltage Rating:50V AC/DC
Operating Temperature Range:-40°~+105°C

Ordering Information
H1254-XXP-A

1: — Series No.
2: — No. of Positions
3: — A: Bag



Dimensional Ordering Information				
Circuits Part No	Dimensions			
	A	B	C	D
2P	--	3.65	1.95	3.20
3P	2.50	4.90	3.00	4.20
4P	3.75	6.15	4.15	5.45
5P	5.00	7.40	4.25	6.70
6P	6.25	8.65	6.25	8.00
7P	7.50	9.90	6.25	9.25
8P	8.75	11.15	6.25	8.00
9P	10.00	12.40	6.25	8.00
10P	11.25	13.65	8.25	10.00
11P	12.50	14.90	8.25	10.00
12P	13.75	16.15	8.25	10.00
13P	15.00	17.40	8.25	10.00
14P	16.25	18.65	8.25	10.00
15P	17.50	19.90	8.25	10.00

5X			
4X			
3X			
2X	Update the description	Judyyan	20220712
1X	ORIGINAL	Tsw	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Tsw
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±5.0°	X': ±5.0°
X.X: ±0.30	X.X': ±3.0°
X.XX: ±0.20	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : H1254-XXP-A

DWG. NO.:

TITLE :

1.25mm Pitch Housing

DATE: 07-Jun-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4