

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0,
Color:Natural(White)

Rating:

Current Rating:1.0 Amp

Voltage Rating:200V AC/DC




Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:40m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

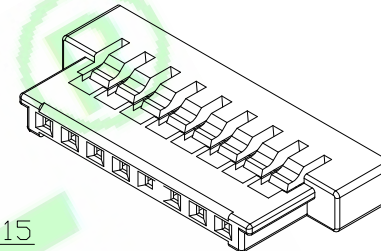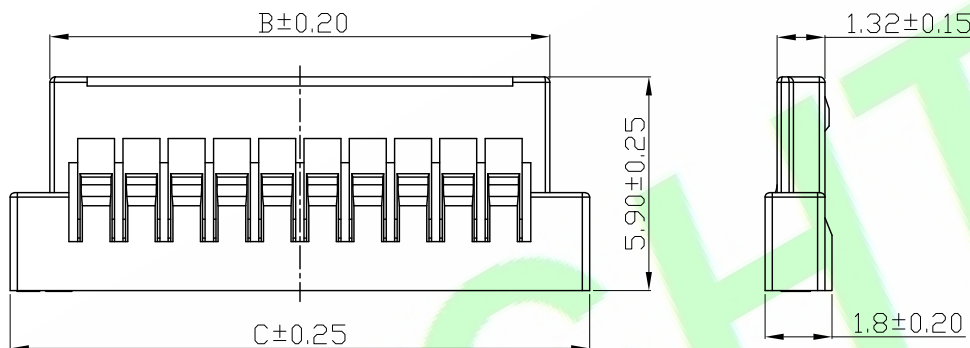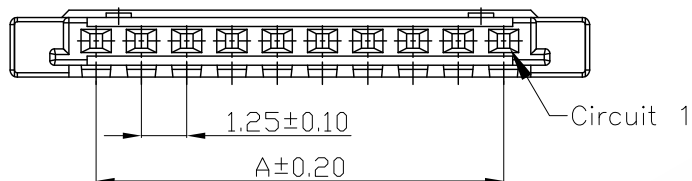


Ordering Information

H1255-XXP-A
1 2 3


1:—Series No.

2:—No. of Positions

3:—A:In Bag

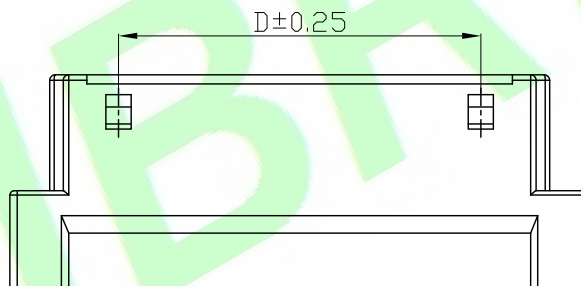

07P~30P

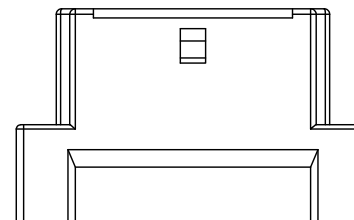

02P~06P


Circuits	Dimensions			
	A	B	C	D
02	1.25	3.80	6.00	----
03	2.50	5.05	7.25	----
04	3.75	6.30	8.50	----
05	5.00	7.55	9.75	----
06	6.25	8.80	11.00	----
07	7.50	10.05	12.25	6.25
08	8.75	11.30	13.50	7.50
09	10.00	12.55	14.75	8.75
10	11.25	13.80	16.00	10.00
11	12.50	15.05	17.25	11.25
12	13.75	16.30	18.50	12.50
13	15.00	17.55	19.75	13.75
14	16.25	18.80	21.00	15.00
15	17.50	20.05	22.25	16.25
20	23.75	26.30	28.50	22.50
25	30.00	32.55	34.75	28.75
30	36.25	38.80	41.00	35.00

5X			
4X			
3X			
2X	Update code options	Judyyan	20220818
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.10	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : H1255-XXP-A
DWG. NO.:
TITLE : 1.25mm Pitch Housing
DATE: 21-Oct-2017

HJBRIGHT® 東莞市華晶電子有限公司	
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	 THIRD ANGLE PROJECTION
SCALE: 1:1	
UNIT: mm	
A4	