

Specifications:
Material And Finish:
Insulator:Nylon 66 UL94V-0 Color:Natural


Rating:
Current Rating:1.0 Amp
Voltage Rating:150V AC/DC
Operating Temperature Range:-40°C~+105°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute



Ordering Information

H1256-XXP-A



1: Series No.
2: No. of Positions
3: A:In Bag



11P~30P With Muscle
Scale 1:2

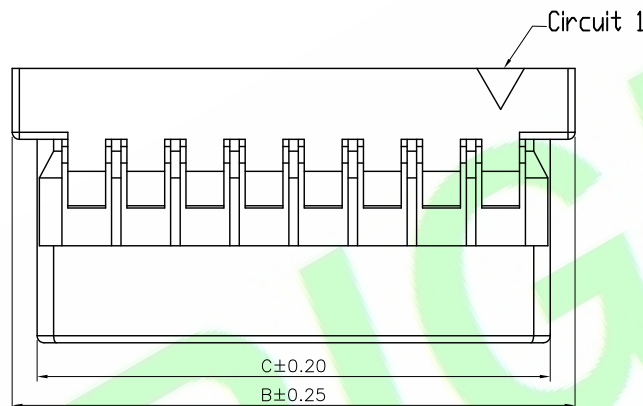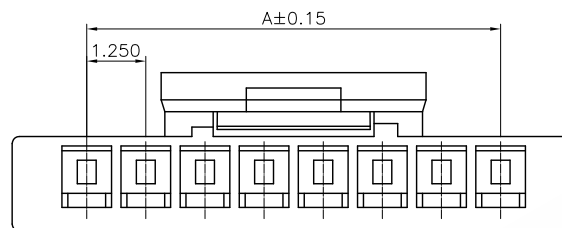

02P~10P Without Muscle
Scale 1:1

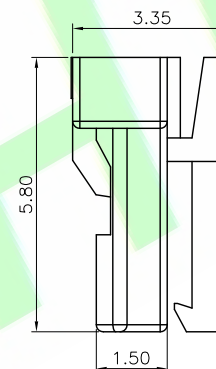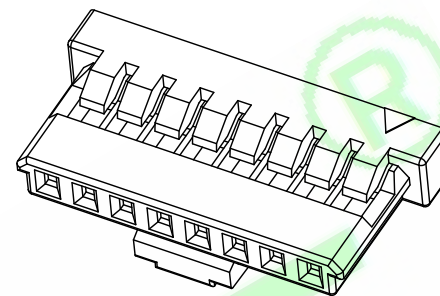

Poles	Dimensions(mm)		
	A	B	C
02	1.25	4.40	3.30
03	2.50	5.65	4.55
04	3.75	6.90	5.80
05	5.00	8.15	7.05
06	6.25	9.40	8.30
07	7.50	10.65	9.55
08	8.75	11.90	10.80
09	10.00	13.15	12.05
10	11.25	14.40	13.30
11	12.50	15.65	14.55
12	13.75	16.90	15.80
13	15.00	18.15	17.05
14	16.25	19.40	18.30
15	17.50	20.65	19.55
20	23.75	26.90	25.80
25	30.00	33.15	32.05
30	36.25	39.40	38.30

5X			
4X			
3X			
2X	Update code options	Judyyan	20220818
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson
CHKD.: Aaron
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±5.0°	X.X: ±0.30
X.X: ±0.30	X.XX: ±0.20
X.XX: ±0.20	X.XXX: ±0.10
X.XXX: ±0.10	X.XXX: ±1.0°

PART NO : H1256-XXP-A
DWG. NO.:
TITLE : 1.25 mm Crimp Style Commctctors
DATE: 10-Oct-2017

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4