

RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA66 UL94V-0
Color:See Ordering Information

Rating:
Current Rating:1.5 Amp
Voltage Rating:50V AC/DC
Operating Temperature Range:-40°~+105°C







Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information

H12580-XXP-01-XA

1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — COLOR:
R:RED B:BLACK
G:GREEN L:BLUE
4: — A:In Bag

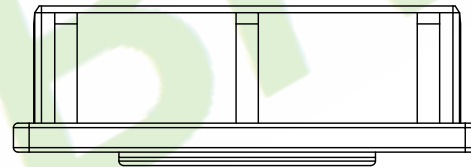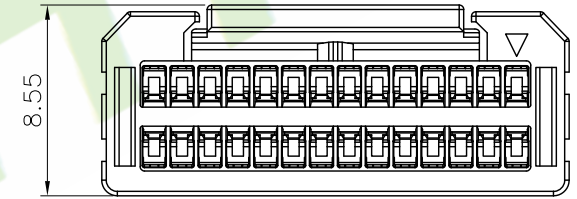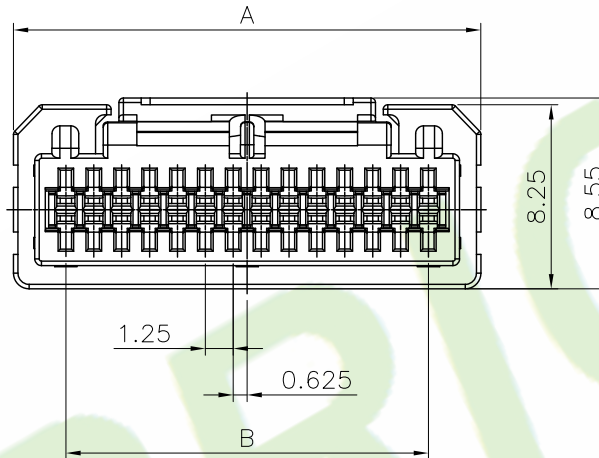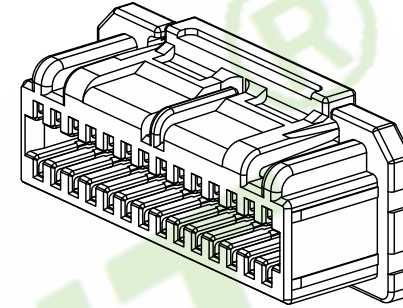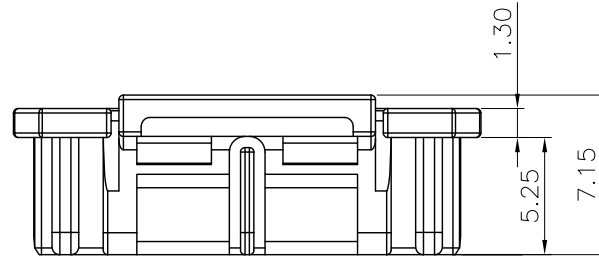

Poles	Dimensions(mm)	
	A	B
08	8.45	3.75
10	9.70	5.00
12	10.95	6.25
14	12.20	7.50
16	13.45	8.75
18	14.70	10.00
20	15.95	11.25
22	17.20	12.50
24	18.45	13.75
26	19.70	15.00
28	20.95	16.25
30	22.20	17.50
32	23.45	18.75
34	24.70	20.00
36	25.95	21.25
38	27.20	22.50
40	28.45	23.75
42	29.70	25.00

5X				DR.BY.: PIP	GENERAL TOLERANCE:		PART NO : H12580-XXP-01-XA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: Aren	X.:	x°: ±5.0°	TITLE : 1.25 mm Housing	SHEET: 1/1		A4
2X					X.X: ±0.30	x.X°: ±3.0°		SCALE: 1:1		
1X	ORIGINAL	PIP		APPD.: Billy	X.XX: ±0.20	x.XX°: ±2.0°	UNIT: mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	x.XXX°: ±1.0°	DATE: 10-Oct-2022			