

Specifications:
Material And Finish:
Insulator:Nylon 66 UL94V-0,
Color:Natural(White)



Rating:
Current Rating:1.0 Amp
Voltage Rating:125V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:250V AC/Minute


Ordering Information

H1259S-XXP-A
1 2 3 4

- 1:— Series No.
2:— S:Straight Type
3:— No. of Positions
4:— A:In Bag

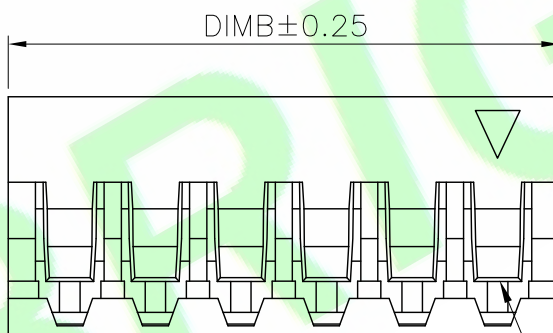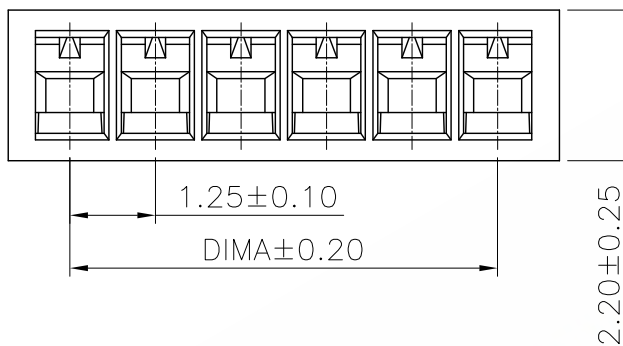

Circuit 1

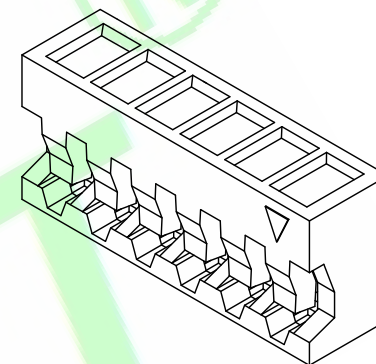

Circuits	Dimensions	
	A	B
02	1.25	3.05
03	2.50	4.30
04	3.75	5.55
05	5.00	6.80
06	6.25	8.05
07	7.50	9.30
08	8.75	10.55
09	10.00	11.80
10	11.25	13.05
11	12.50	14.30
12	13.75	15.55
13	15.00	16.00
14	16.25	18.05
15	17.50	19.30

5X			
4X			
3X			
2X	Update code options	Judyyan	20220811
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Judyyan
CHKD:	Aaron
APPD:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.10	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : H1259S-XXP-A
DWG. NO.:
TITLE : 1.25mm Pitch Crimp Style Housing
DATE: 21-Oct-2017

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4