

Specifications:

Material :
Insulator:PA66 UL94V-0 Color:Natural

Rating:

Current Rating:1.0 Amp
Voltage Rating:50V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:


Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information


H1500-XXP-A

1 2 3





- 1: — Series No.
2: — No. of Positions
3: — A:Bag

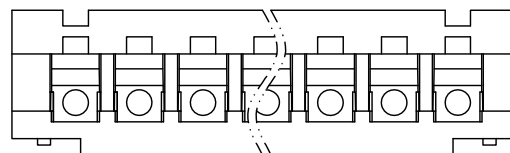

6P ~ 16P




2P ~ 5P

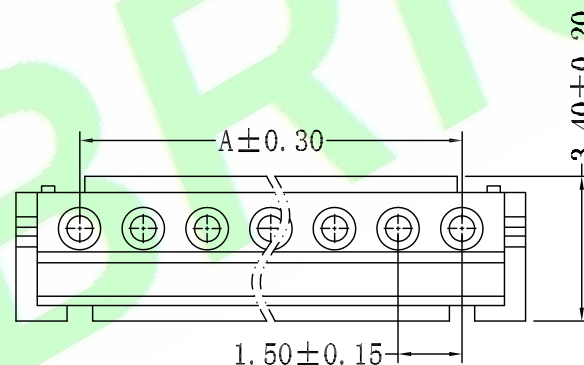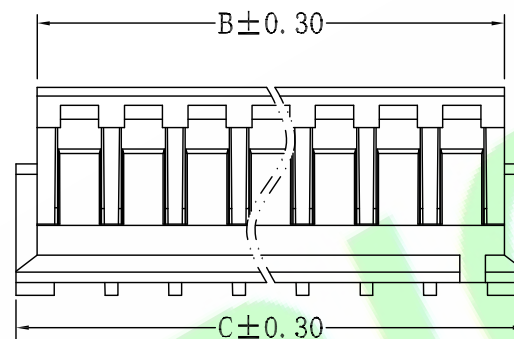

Part No	A	B	C
02	1.50	3.30	4.50
03	3.00	4.80	6.00
04	4.50	6.30	7.50
05	6.00	7.80	9.00
06	7.50	9.30	10.50
07	9.00	10.80	12.00
08	10.50	12.30	13.50
09	12.00	13.80	15.00
10	13.50	15.30	16.50
11	15.00	16.80	18.00
12	16.50	18.30	19.50
13	18.00	19.80	21.00
14	19.50	21.30	22.50
15	21.00	22.80	24.00

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : H1500-XXP-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Tony	X': ±	X': REF±6°	TITLE :		
2X					X.X': ±0.25	X.X': ±2.0°	1.50mm Pitch Crimp Style Housing		
1X	ORIGINAL	Bruce		APPD.: Billy	X.XX': ±0.15	X.XX': ±2.0°	DATE: 02-Jun-2017		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX': ±0.08	X.XXX': ±2.0°		SHEET: 1/1	THIRD ANGLE PROJECTION
								SCALE: 1:1	
								UNIT: mm	



THIRD ANGLE PROJECTION

A4