

Specifications:

Material And Finish:

Insulator:PBT/PA66 UL94V-0

Rating:

Current Rating:1.5 Amp (24AWG)

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Contact Resistance:20mΩ Max

Insulation Resistance:500MΩ Min

Withstanding Voltage:500V AC/mlnute












Ordering Information

H15001-XXP-XA

1 2 3 4

- 1: — Series No.
 2: — No. of Positions
 3: — N:Natural
 B:Black
 R:Red
 BL:Blue
 GN:Green
 4: — A:In Bag

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
08P	10.20	7.20	4.50	26P	23.70	20.70	18.00
10P	11.70	8.70	6.00	28P	25.20	22.20	19.50
12P	13.20	10.20	7.50	30P	26.70	23.70	21.00
14P	14.70	11.70	9.00	32P	28.20	25.20	22.50
16P	16.20	13.20	10.50	34P	29.70	26.70	24.00
18P	17.70	14.70	12.00	36P	31.20	28.20	25.50
20P	19.20	16.20	13.50	38P	32.70	29.70	27.00
22P	20.70	17.70	15.00	40P	34.20	31.20	28.50
24P	22.20	19.20	16.50				

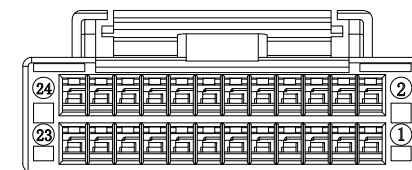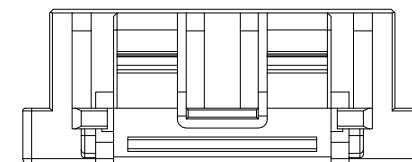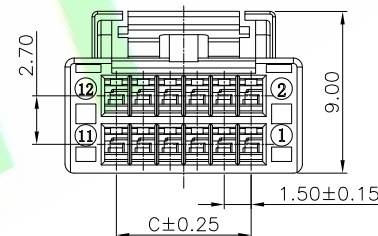

8~10 PIN

12~22 PIN

24~40 PIN

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Judyyan
CHKD.:	Aaron
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.25	X.X: ±3.0°
X.XX: ±0.15	X.XX: ±2.0°
X.XXX: ±0.05	X.XXX: ±1.0°

PART NO. : H15001-XXP-XA
DWG. NO.:
TITLE : 1.5mm Pitch CONN Housing
DATE: 29-Jul-2020

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4