


RoHS Compliant





Specifications:
Material And Finish:
Insulator: PA66 UL94V-0

Rating:
Current Rating: 10-30P (2A) /32-40P (1.5A) AC/DC
Voltage Rating: 100V AC/DC
Operating Temperature Range: -40°C~+105°C

Electrical:
Contact resistance: 30m Ohm Max.
Insulator resistance: 500M ohm min.
Withstanding Voltage: 500V AC/Minute



A-A

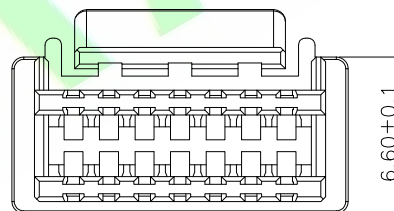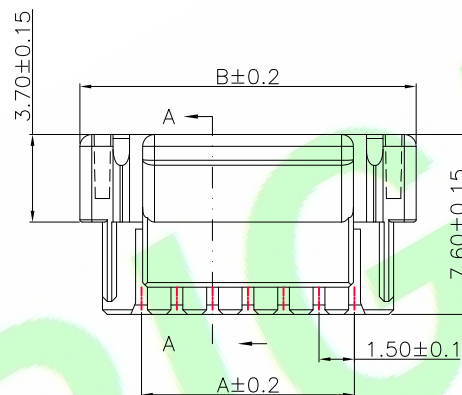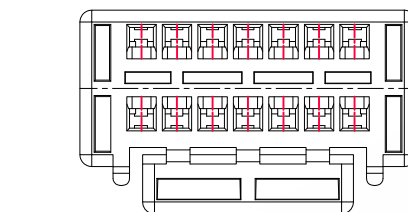

Ordering Information

H15005-XXP-XXA

1 2 3 4

- 1: — Series No.
- 2: — No. of Positions
- 3: — NA:Natural
BL:Blue
IV:Ivory
MG:Moss Green
TR:Tomato Red
DP:Dark Pink
- 4: — A:In Bag

Circuits	Dimensions (mm)	
	A	B
10	6.0	11.2
12	7.5	12.7
14	9.0	14.2
16	10.5	15.7
18	12.0	17.2
20	13.5	18.7
22	15.0	20.2
24	16.5	21.7
26	18.0	23.2
28	19.5	24.7
30	21.0	26.2

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H15005-XXP-XXA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Ken	LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.:	x.: ±0.25	x': ±6°	TITLE : 1.50mm Pitch Housing	SHEET: 1/1		A4
2X	Update code options	Judyyan	2020220820	Tony	x.x: ±0.15	x.xx: ±3°		SCALE: 1:1		
1X	ORIGINAL	Ken		APPD.:	x.xxx: ±0.08	x.xxx': ±2°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO	Billy			DATE: 19-May-2021		THIRD ANGLE PROJECTION	