

Specifications:

Material :

Insulator:PA66 UL94V-0 Color:Natural

Rating:

Current Rating:3.0 Amp

Voltage Rating:350V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information




H1501-XXP-A

1 2 3

1:— Series No.


2:— No. of Positions

3:— A:In Bag

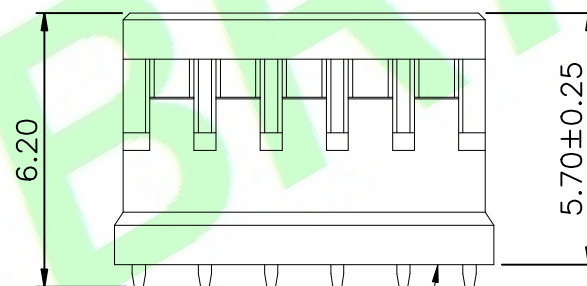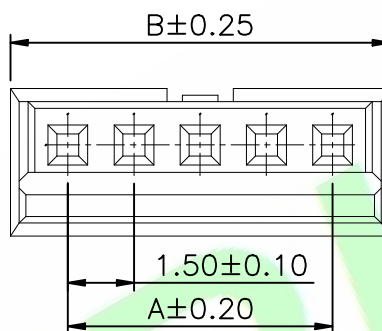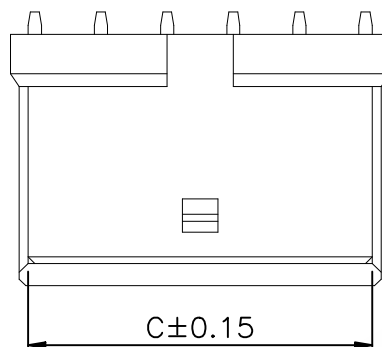

Circuit 1

3.25±0.25

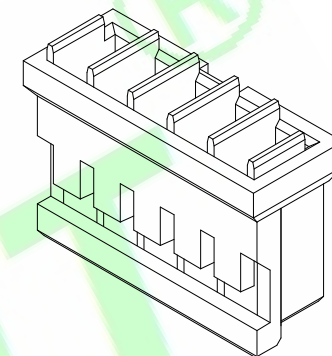

Circuits	Dimensions(mm)		
	A	B	C
02	1.50	4.30	3.20
03	3.00	5.80	4.70
04	4.50	7.30	6.20
05	6.00	8.80	7.70
06	7.50	10.30	9.20
07	9.00	11.80	10.70
08	10.50	13.30	12.20
09	12.00	14.80	13.70
10	13.50	16.30	15.20
11	15.00	17.80	16.70
12	16.50	19.30	18.20
13	18.00	20.80	19.70
14	19.50	22.30	21.20
15	21.00	23.80	22.70

5X			
4X			
3X	Update code options	Judyyan	20220723
2X	Revised drawings	Aaron	20190412
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Bruce
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
x: ±	x°: ±2.0°
x.x: ±0.30	x.x°: ±2.0°
x.xx: ±0.20	x.xx°: ±2.0°
x.xxx: ±0.05	x.xxx°: ±2.0°

PART NO : H1501-XXP-A
DWG. NO.:
TITLE : 1.50mm Pitch Crimp Style Housing
DATE: 02-Jun-2017

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4