




RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA66 UL94V-0 Color:Black
Rating:
Current Rating:3.0 Amp
Operating Temperature Range:-40°~+105°C

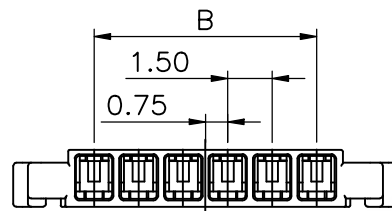




2~4P

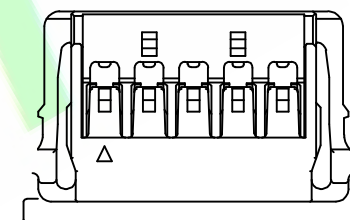

5P~12P

Ordering Information
H1503-XXP-A
1 2 3

1: — Series No.
2: — No. of Positions
3: — A:In Bag

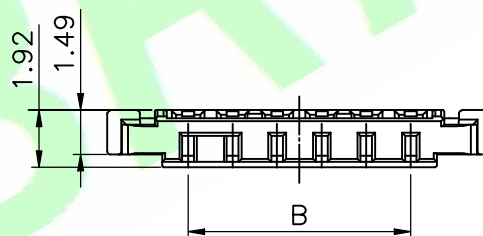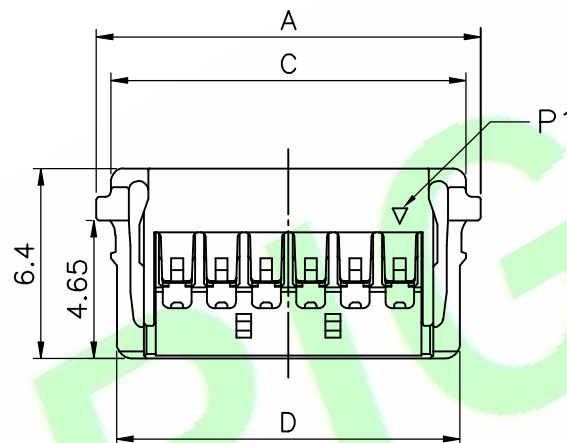

Circuits	Dimensions			
	A	B	C	D
02	6.95	1.5	5.95	5.55
03	8.45	3.0	7.45	7.05
04	9.95	4.5	8.95	8.55
05	11.45	6.0	10.45	10.05
06	12.95	7.5	11.95	11.55
07	14.45	9.0	13.45	13.05
08	15.95	10.5	14.95	14.55
10	18.95	13.5	17.95	17.55
12	21.95	16.5	20.95	20.55

5X			
4X			
3X			
2X	Update code options	Judyyan	20220819
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Bruce
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
0.5~1.0 ±0.10	X°: ±3.0°
1.0~10 ±0.20	X.X°: ±3.0°
10~30 ±0.25	X.XX°: ±3.0°
30 OVER ±0.30	X.XXX°: ±3.0°

PART NO : H1503-XXP-A
DWG. NO.:
TITLE : 1.50mm Pitch Crimp Style Housing
DATE: 02-Jun-2008

HJBRIGHT®

東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4