
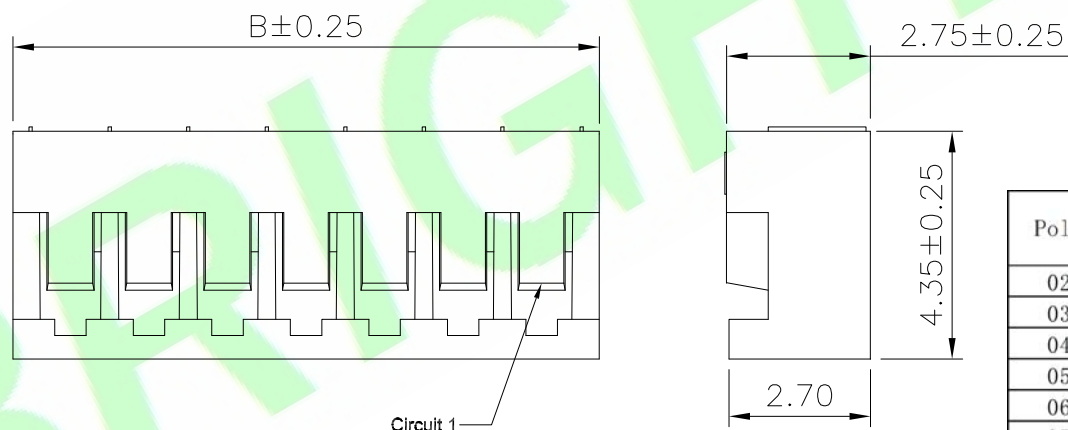


Specifications:
Material And Finish:
Insulator:PA66 UL94V-0 Color:White

Rating:
Current Rating:1.5 Amp
Voltage Rating:150V AC/DC
Operating Temperature Range:-40°~+105°C
Contact Resistance:20mΩ Max
Insulation Resistance 500MΩ Min
Withstanding Voltage:500V AC/mInute

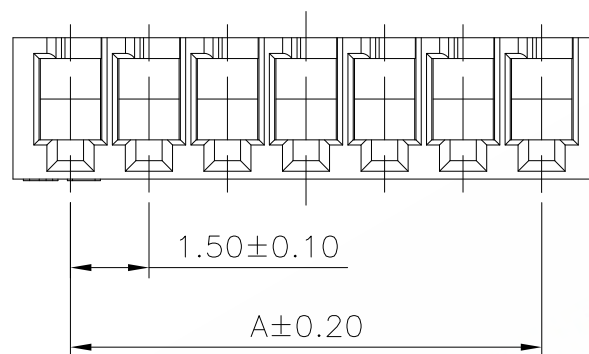


Ordering Information

H1506-XXP-A

1 2 3

- 1: — Series No.
2: — No. of Positions
3: — A:In Bag

Poles	Dimensions (mm)	
	A	B
02P	1.50	3.70
03P	3.00	5.20
04P	4.50	6.70
05P	6.00	8.20
06P	7.50	9.70
07P	9.00	11.20
08P	10.50	12.70
09P	12.00	14.20
10P	13.50	15.70
11P	15.00	17.20
12P	16.50	18.70
13P	18.00	20.20
14P	19.50	21.70
15P	21.00	23.20

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : H1506-XXP-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±5.0°	x°: ±5.0°	TITLE : 1.50mm Pitch Housing		SHEET: 1/1			A4
2X	Update the description	Judyyan	20220712		x.x: ±0.30	x.x°: ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Tsw		APPD.:	x.xx: ±0.20	x.xx°: ±2.0°	DATE: 07-Jun-2021		UNIT: mm			
REV	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx°: ±1.0°						