

Specifications:

Material And Finish:

Insulator: NYLON UL94V-0 ,Color: Black

Rating:

Current Rating: 4.0 Amp (#22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 1000V AC/Minute

Ordering Information

H1800M-XXP-XX-A

1 2 3 4 5

1: Series No.

2: M: Male

3: No. of Positions

4: V0: No empty P, No Seal Plugs


V4: Empty 4P, Have Seal Plugs

V6: Empty 6P, Have Seal Plugs

V8: Empty 8P, Have Seal Plugs

V10: Empty 10P, Have Seal Plugs

5: A: In Bag

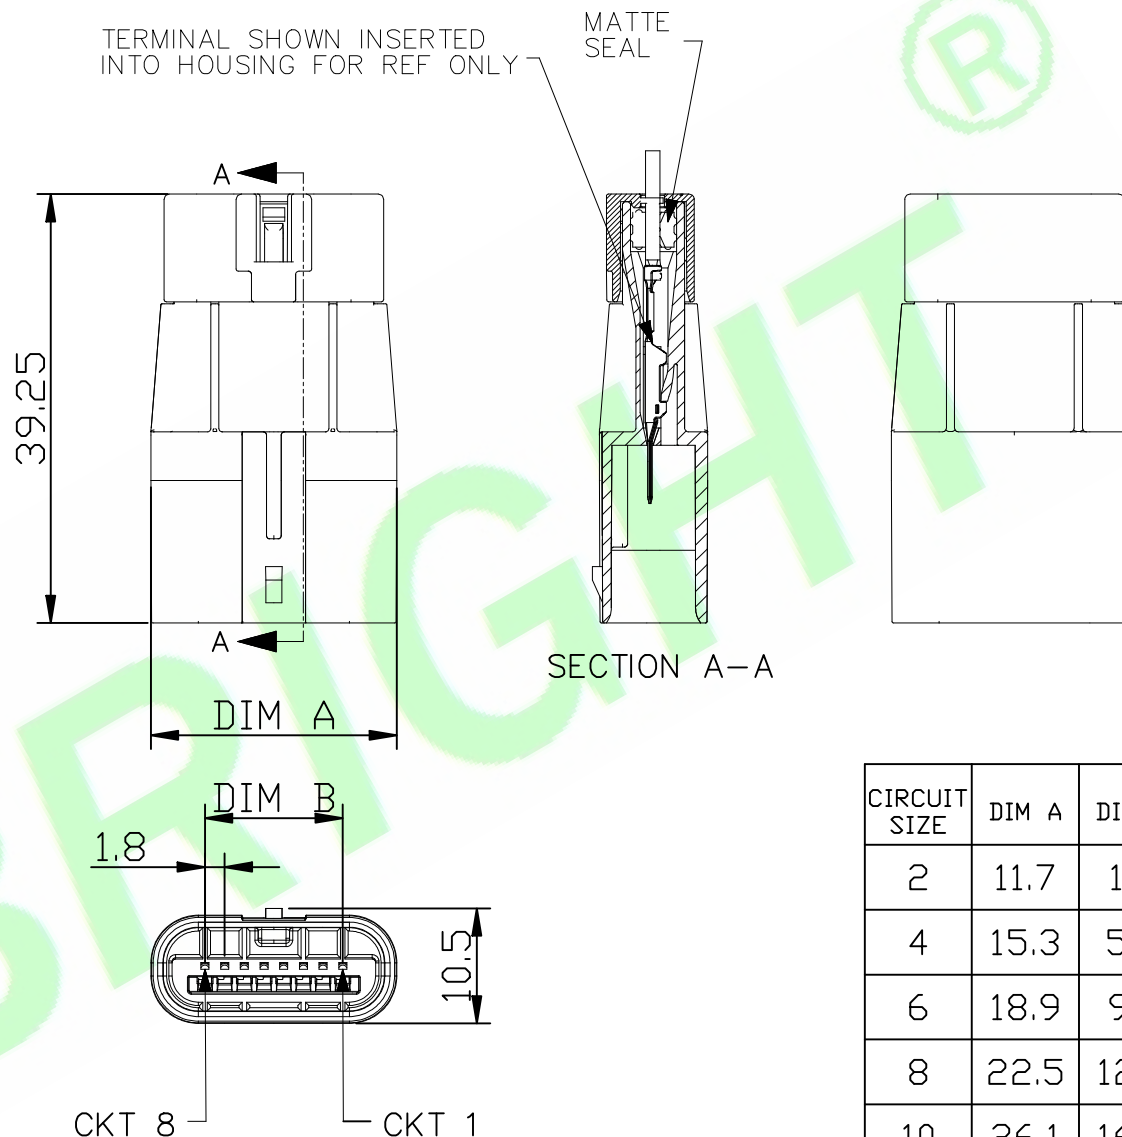

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±5.0°	X.X: ±3.0°
X.X: ±0.30	X.XX: ±2.0°
X.XX: ±0.20	X.XXX: ±1.0°
X.XXX: ±0.10	

PART NO : H1800M-XXP-XX-A
DWG. NO.:
TITLE : Squba Sealed Plug Assembly, 1.80mm Pitch Single Row
DATE: 14-Nov-2022

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED


SHEET: 1/2
SCALE: 1:1
UNIT: mm




THIRD ANGLE PROJECTION

A4

2 CKT

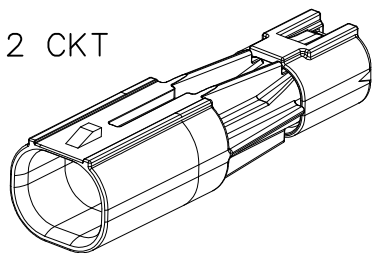


6 CKT


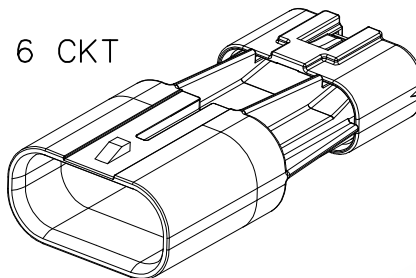


1. VOIDED CIRCUITS HAVE A PLUG IN THE MATTE SEAL TO SEAL THE CIRCUIT AND WILL NOT ACCEPT TERMINALS.

4 CKT

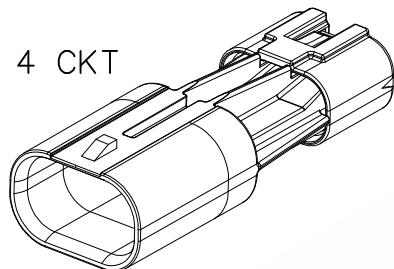


8 CKT

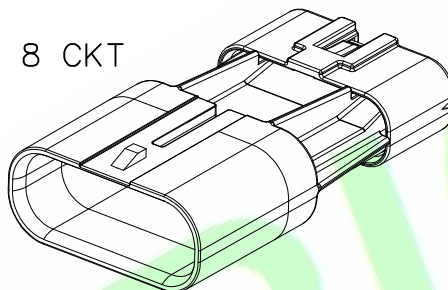


VOIDED CIRCUIT(S)
HAVE PLUG(S) PRESENT
SEE NOTE 1

10 CKT

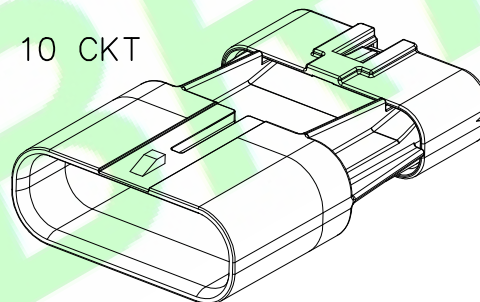

TERMINAL

CKT 1 ID

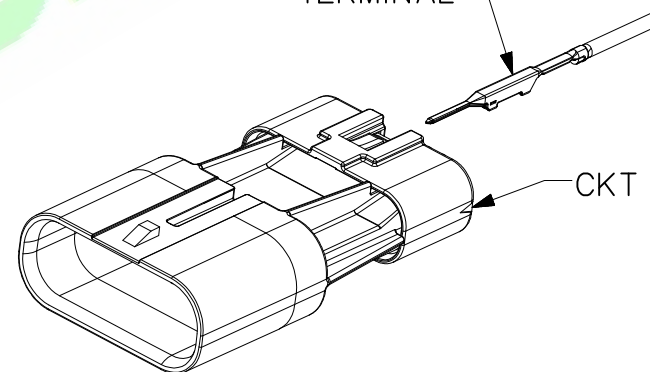

AVAILABLE CIRCUIT SIZES

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H1800M-XXP-XX-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : Squba Sealed Plug Assembly, 1.80mm Pitch Single Row	SHEET: 2/2		A4
2X				APPD.: Billy	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Judyyan			x.xx: ±0.10	x.xx': ±2.0°		UNIT: mm		
REV	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 14-Nov-2022			