

Specifications:**Material And Finish:**

Insulator:PA66 UL94V-0,Color:Natura

Rating:

Current Rating:2.0 Amp

Voltage Rating:100V AC/DC

Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:10m Ohm Max

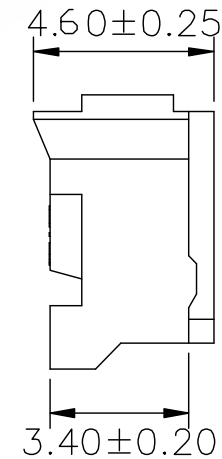
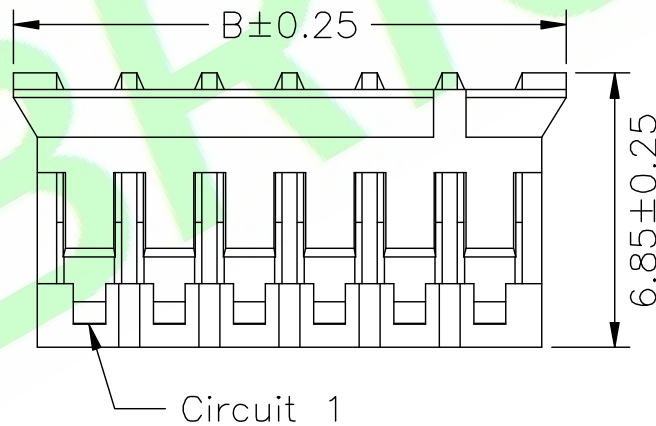
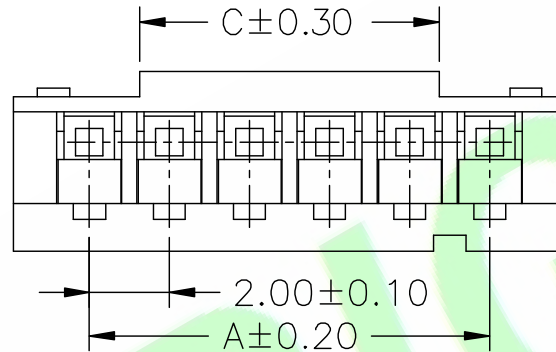
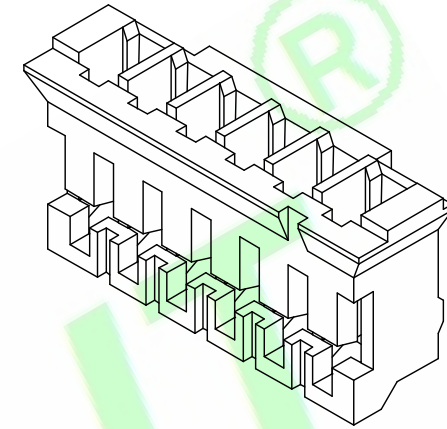
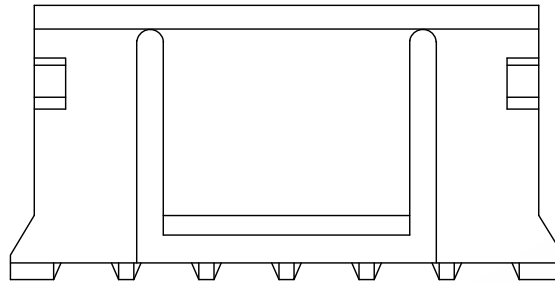
Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

Ordering Information**H2001-XXP-A**

1 2 3

- 1: — Series No.
2: — No. of Positions
3: — A:Bag

**Ordering Information & Dimensions**

Poles	Dimensions (mm)		
	A	B	C
02P	2.00	5.80	0.30
03P	4.00	7.80	1.30
04P	6.00	9.80	3.30
05P	8.00	11.80	5.30
06P	10.00	13.80	7.30
07P	12.00	15.80	9.30
08P	14.00	17.80	11.30
09P	16.00	19.80	13.30
10P	18.00	21.80	15.30
11P	20.00	23.80	17.30
12P	22.00	25.80	19.30
13P	24.00	27.80	21.30
14P	26.00	29.80	23.30
15P	28.00	31.80	25.30
16P	30.00	33.80	27.30
17P	32.00	35.80	29.30
18P	34.00	37.80	31.30

5X			
4X			
3X			
2X	Code options update	Judyyan	20220722
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.:	Samson
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±5.0°	X.X: ±3.0°
X.X: ±0.30	X.XX: ±2.0°
X.XX: ±0.20	X.XXX: ±1.0°
X.XXX: ±0.10	

PART NO : H2001-XXP-A
DWG. NO.:
TITLE : 2.00mm Crimp Style Connectors
DATE: 10-Nov-2010

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4