

RoHS Compliant

Specifications:

Material And Finish:

Contact: Phosphor Bronze with Tin-plated

Rating:

Current Rating: 3A AC/DC (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 800V AC/Minute

APPLICABLE WIRE: AWG #22~#28

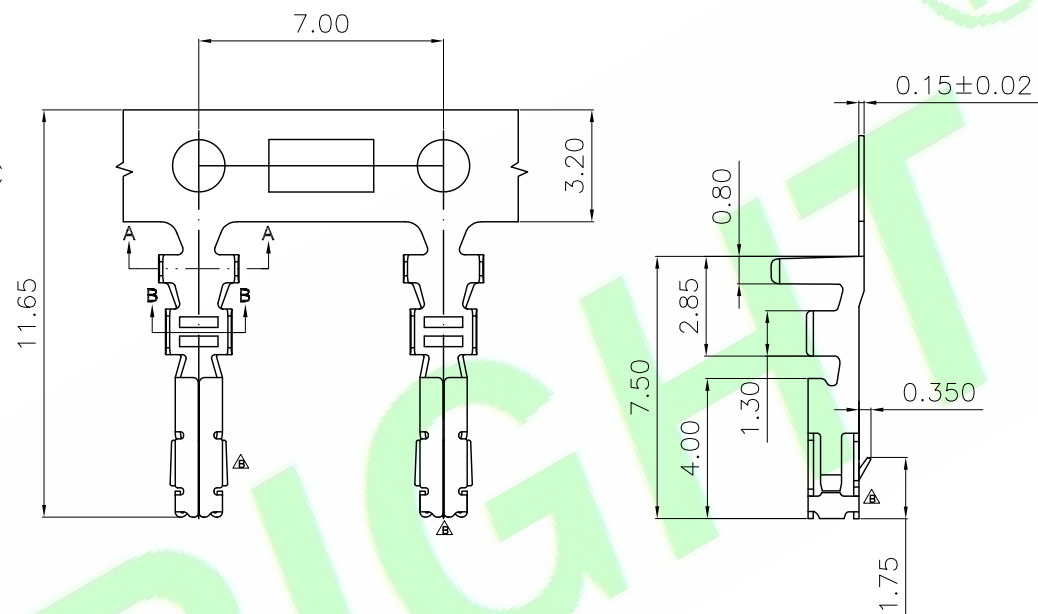

Ordering Information

H20012T-PQ


1 2 3

1: Series No.


2: T: Terminal

3: Plated:



Q: Tin Plated




Section A-A
Scale: 1:1



Section B-B
Scale: 1:1



5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H20012T-PQ	HJBRIGHT[®] 东莞市華晶電子有限公司			
4X				Tsw	LINEAR	ANGLES	DWG. NO.:				BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
3X				CHKD.:	x.:	x': ±5.0°	TITLE : 2.00mm Terminal	SHEET: 1/1			
2X	Update code options	Judyyan	20220825	Mark	x.x: ±0.30	x.x': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Tsw		APPD.:	x.xx: ±0.20	x.xx': ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 31-Aug-2021	THIRD ANGLE PROJECTION			