

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Rating:

Current Rating:3.0 Amp (22AWG)

Voltage Rating:250V AC/DC





Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

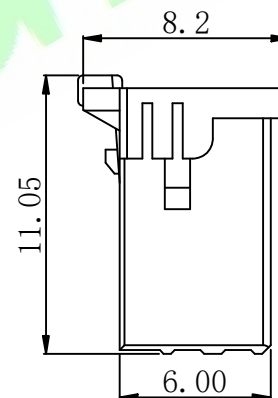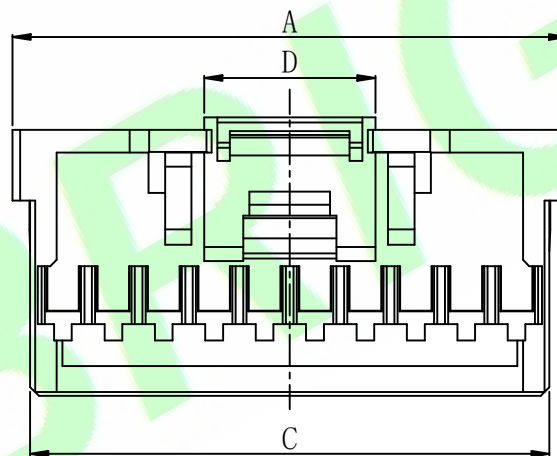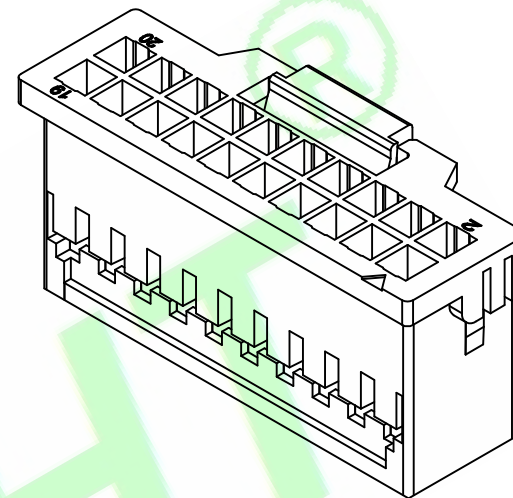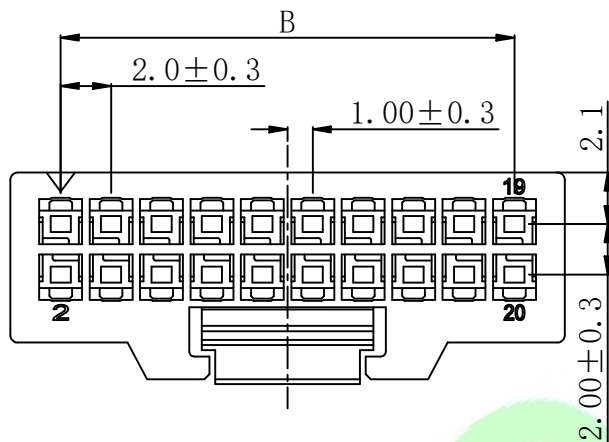

Ordering Information

H20022-XXP-A
1 2 3

1: — Series No.

2: — No. of Positions

3: — A:In Bag

D	C	B	A	CKT.
6.8	40.6	38	42	40
6.8	38.6	36	40	38
6.8	36.6	34	38	36
6.8	34.6	32	36	34
6.8	32.6	30	34	32
6.8	30.6	28	32	30
6.8	28.6	26	30	28
6.8	26.6	24	28	26
6.8	24.6	22	26	24
6.8	22.6	20	24	22
6.8	20.6	18	22	20
6.8	18.6	16	20	18
6.8	16.6	14	18	16
6.8	14.6	12	16	14
6.8	12.6	10	14	12
5.1	10.6	8	12	10

5X				DR.BY.: Aaron	GENERAL TOLERANCE:	PART NO : H20022-XXP-A	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	SHEET: 1/1 SCALE: 1:1 UNIT: mm		A4
4X				CHKD.: Tony	0.00~0.25: ±0.03 0.25~0.50: ±0.05 0.50~1.00: ±0.10 1.00~10.0: ±0.20 10.0~30.0: ±0.25 30.0~ : ±0.30	DWG. NO.:				
3X	Update the rated current	Judyyan	202406005	APPD.: Billy		TITLE : IGRID 2.0MM W/B DUAL RCPT HSG (RoHS)				
2X	Update the description	Judyyan	202207012			DATE: 18-Feb-2019				
1X	ORIGINAL	Aaron								
REV.	DESCRIPTION	DR.BY	ECN. NO.							