

Specifications:
Material And Finish:
Insulator:Nylon66 UL94V-0,Color:White

Rating:
Current Rating:3.0Amp(22AWG)
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°C~+105°C





Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute

Ordering Information

H20042-XXP-03-A

1 2 3

- 1: — Series No.
2: — No. of Positions
3: — A:In Bag

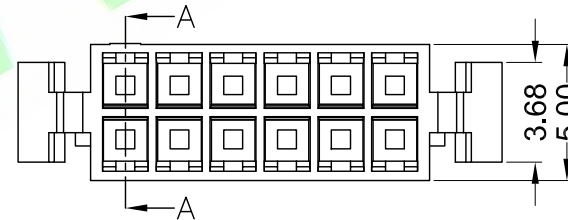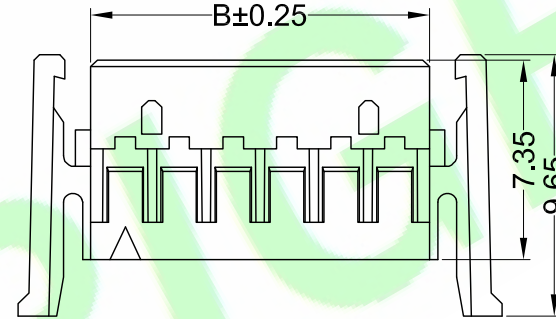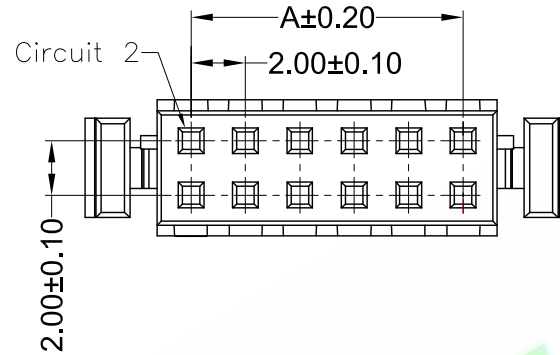


Circuits	Dimension mm	
	A	B
2*02P	2.00	4.50
2*03P	4.00	6.50
2*04P	6.00	8.50
2*05P	8.00	10.50
2*06P	10.00	12.50
2*07P	12.00	14.50
2*08P	14.00	16.50
2*09P	16.00	18.50
2*10P	18.00	20.50
2*11P	20.00	22.50
2*12P	22.00	24.50
2*13P	24.00	26.50
2*14P	26.00	28.50
2*15P	28.00	30.50
2*16P	30.00	32.50
2*17P	32.00	34.50
2*18P	34.00	36.50
2*19P	36.00	38.50
2*20P	38.00	40.50

5X			
4X			
3X			
2X	Update code options	Judyyan	20221125
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±5.0°	X.X: ±3.0°
X.X: ±0.30	X.XX: ±2.0°
X.XX: ±0.20	X.XXX: ±1.0°
X.XXX: ±0.10	

PART NO : H20042-XXP-03-A
DWG. NO.:
TITLE : 2.00mm Crimp Style Connectors
DATE: 23-Oct-2017

HJBRIGHT® BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED 東莞市華晶電子有限公司		
SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
SCALE: 1:1		
UNIT: mm		