

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Rating:

Current Rating:3.0 Amp (22AWG)

Voltage Rating:250V AC/DC





Operating Temperature Range:-40° C~+105° C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

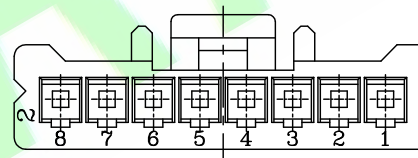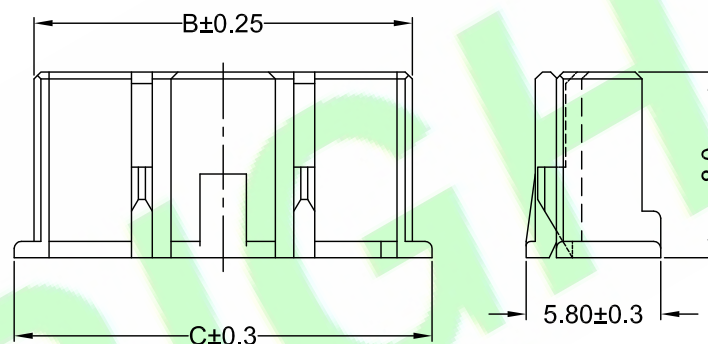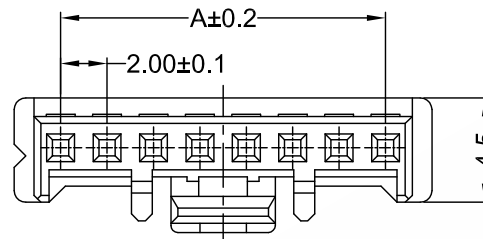


Ordering Information

H2005-XXP-A

1 2 3

- 1: — Series No.
2: — No. of Positions
3: — A:In bag

Poles	Dimensions (mm)		
	A	B	C
02	2.00	4.30	6.00
03	4.00	6.30	8.00
04	6.00	8.30	10.00
05	8.00	10.30	12.00
06	10.00	12.30	14.00
07	12.00	14.30	16.00
08	14.00	16.30	18.00
09	16.00	18.30	20.00
10	18.00	20.30	22.00
11	20.00	22.30	24.00
12	22.00	24.30	26.00
13	24.00	26.30	28.00
14	26.00	28.30	30.00
15	28.00	30.30	32.00
16	30.00	32.30	34.00

5X				DR.BY.: Sophia	GENERAL TOLERANCE:		PART NO : H2005-XXP-A	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Ren	X.:	X': ±5.0°	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X	Update code options	Judyyan	20220803	APPD.: Billy	X.X: ±0.30	X.X': ±3.0°	2.00mm Crimp Style Housing	SCALE: 1:1	
1X	ORIGINAL	Sophia			X.XX: ±0.20	X.XX': ±2.0°	DATE: 10-Sep-2020	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°			A4