

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC



Temperature Range:-40°C~+125°C

Electrical:


Contact resistance:25m Ohm Max

Insulator resistance:100M ohm min.




Withstanding Voltage:1000V AC/Minute

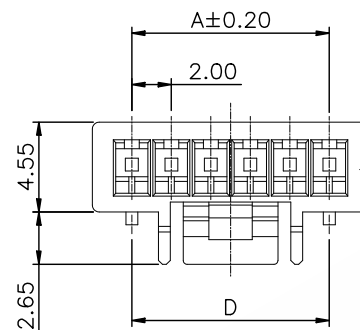

2~5P The Side Lock



6~15P The Side Lock

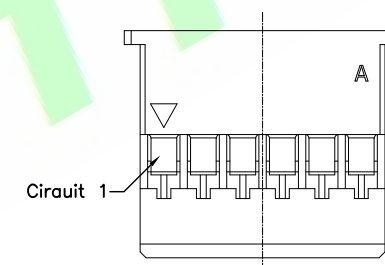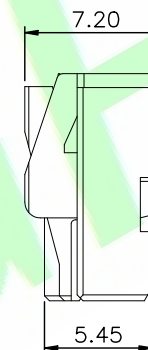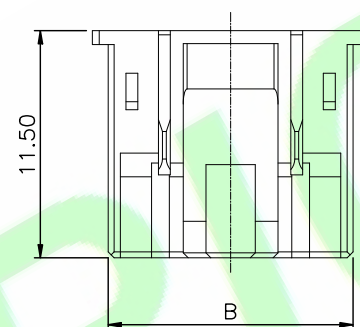

Ordering Information


H2005L-XXP-A

1 2 3

1: — Series No.

2: — No. of Positions


3: — A:In Bag




Circuits	A	B	C	D
2	2.00	4.40	3.30	
3	4.00	6.40	5.10	
4	6.00	8.40	6.80	
5	8.00	10.40	9.05	
6	10.00	12.40	11.15	10.00
7	12.00	14.40	13.15	
8	14.00	16.40	15.15	
9	16.00	18.40	17.15	
10	18.00	20.40	19.15	17.40
11	20.00	22.40	21.15	
12	22.00	24.40	23.15	
13	24.00	26.40	25.15	
14	26.00	28.40	27.15	
15	28.00	30.40	29.15	

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H2005L-XXP-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	x.:	x': ±5.0°	TITLE : 2.00mm Pitch Housing		SHEET: 1/2			A4
2X				Aren	x.x: ±0.30	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.20	x.xx': ±2.0°	DATE: 20-Jul-2021		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°						


RoHS Compliant

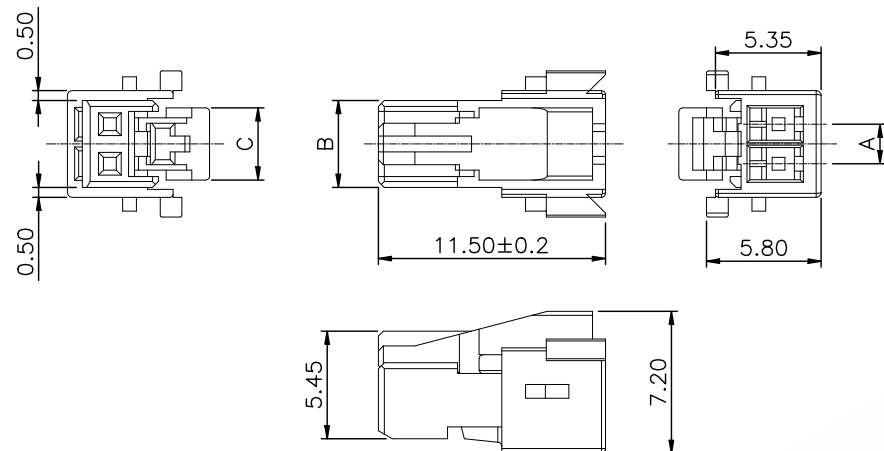

2P

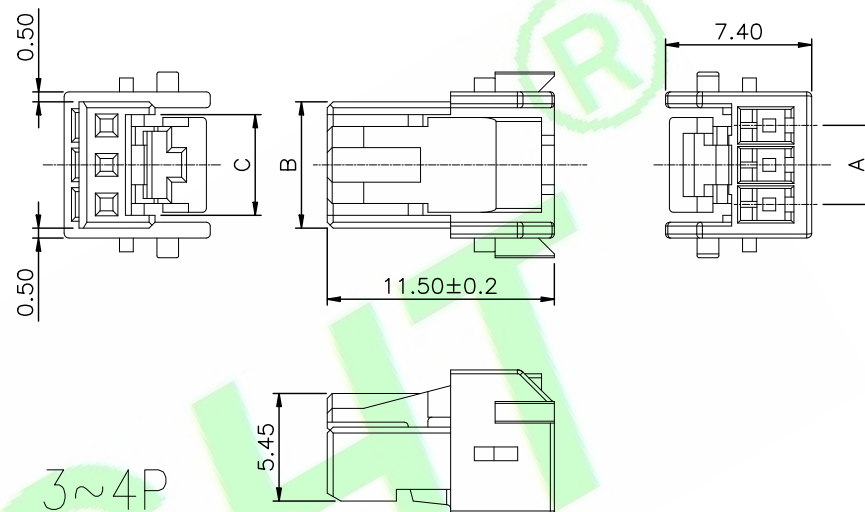

3~4P

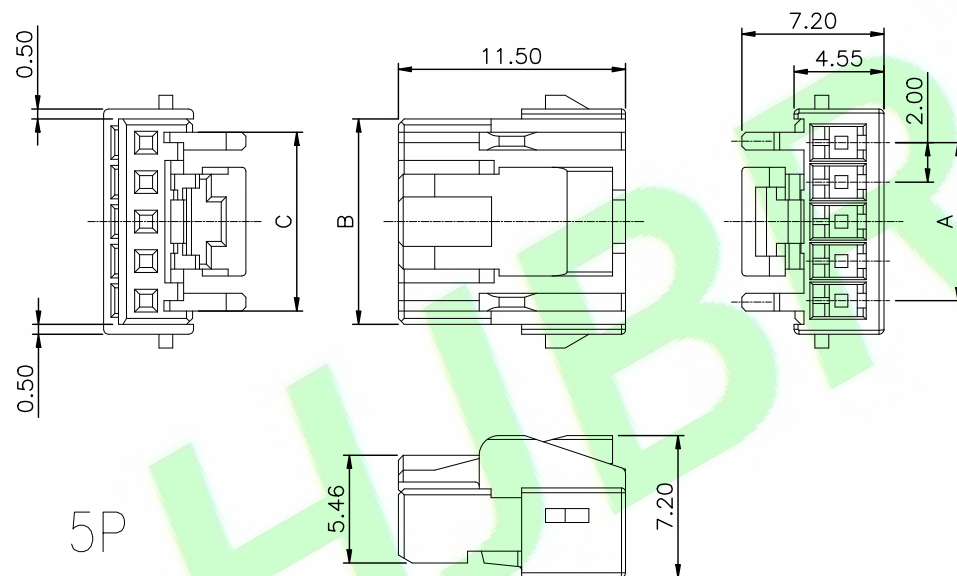

5P

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H2005L-XXP-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.:	x': ±5.0°	TITLE : 2.00mm Pitch Housing				
2X				Aren	x.x: ±0.30	x.x': ±3.0°					
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.20	x.xx': ±2.0°	DATE: 10-Jan-2021		SHEET: 2/2		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°			SCALE: 1:1		
									UNIT: mm	THIRD ANGLE PROJECTION	