

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Natural

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Temperature Range:-40°C~+125°C

Electrical:

Contact resistance:25m Ohm Max







Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

H2005L-XXP-TPA-A








- 1: — Series No.
2: — No. of Positions
3: — A:In Bag

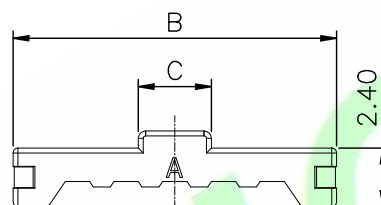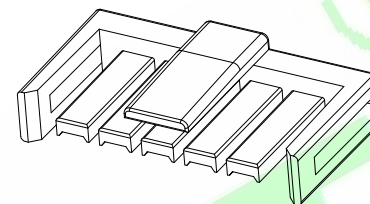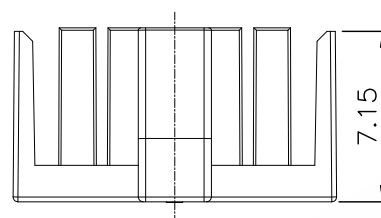

Circuits	A	B	C
2	2.00	7.30	2.20
3	4.00	9.30	3.00
4	6.00	11.30	3.00
5	8.00	13.30	3.00

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H2005L-XXP-TPA-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	X.:	X': ±5.0°	TITLE : 2.00mm Pitch TPA 2~5P (H2005L Series)		SHEET: 1/2		A4	
2X				Aren	x.x: ±0.30	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.20	x.xx': ±2.0°	DATE: 20-Jul-2021		UNIT: mm			THIRD ANGLE PROJECTION
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°						

RoHS Compliant

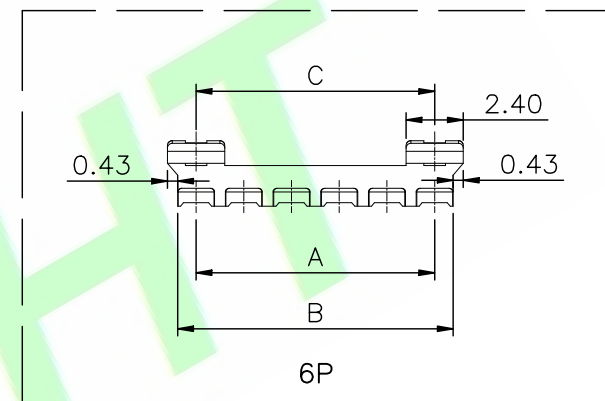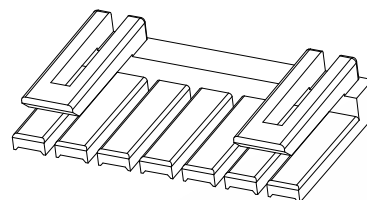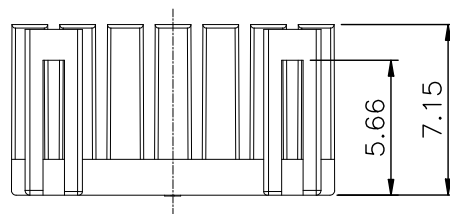

Circuits	A	B	C
6	10.00	11.55	
7	12.00	13.55	10.00
8	14.00	15.55	
9	16.00	17.55	12.00
10	18.00	19.55	
11	20.00	21.55	
12	22.00	23.55	17.40
13	24.00	25.55	
14	26.00	27.55	
15	28.00	29.55	

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H2005L-XXP-TPA-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	x.:	x': ±5.0°	TITLE : 2.00mm Pitch TPA 6~15P(H2005L Series)		SHEET: 2/2			A4
2X				Aren	x.x: ±0.30	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.20	x.xx': ±2.0°	DATE: 20-Jul-2021		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°						