

Specifications:
 Material And Finish:
 Terminal: Phosphor Bronze
 Plated: See Ordering Information

Rating:
 Current Rating: 3.0 Amp
 Voltage Rating: 250V AC/DC
 Temperature Range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$





Electrical:
 Contact resistance: 25m Ohm Max
 Insulator resistance: 100M ohm min.
 Withstanding Voltage: 0V AC/Minute
 Wire Range: #24~20AWG

Ordering Information

H2005LT-PQ

1 2 3

1: — Series No.
 2: — T: Terminal
 3: — Q: Tin Plated

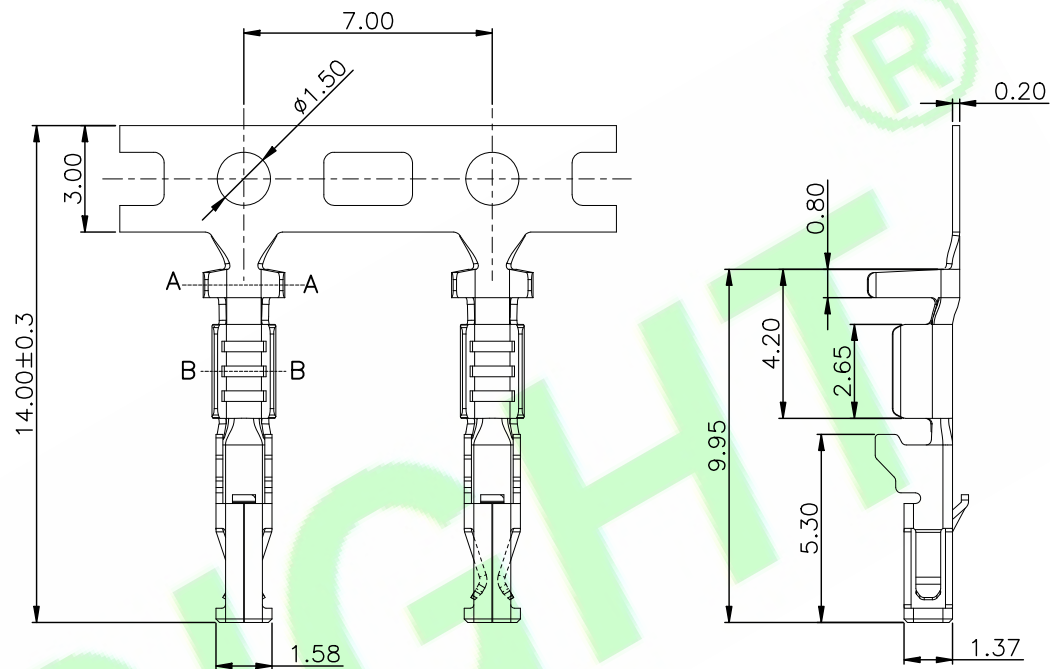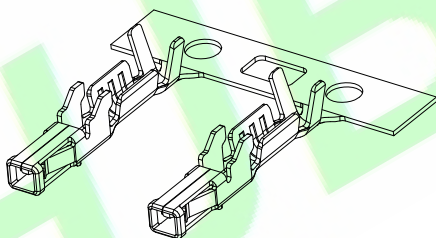

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H2005LT-PQ	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.:	x.: ±0.50	x': ±5.0°	TITLE : 2.00mm Pitch Terminal	SHEET: 1/1		A4
2X				Aren	x.x: ±0.30	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.20	x.xx': ±2.0°		DATE: 20-Jul-2021		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°				