

RoHS Compliant

Specifications

Housing Material :Copper Alloy
Plated :SEE **Ordering Information**
Cable Spec. :SEE TABLE1
Wire Range :SEE TABLE1
Ins. Range :SEE TABLE1

Ordering Information

H20062T-PX-XX

1 2 3 4 5

1: — Series No.

2: — T:terminal

3: — Q:TIN Plated

A:Au Plated

4: — D:D WIND (LEFT PAYOFF)

B:B WIND (RIGHT PAYOFF)

5: — GRIP CODE

M:WIRE GAGE:0.22mm²

S:WIRE GAGE:0.13mm²

L:WIRE GAGE:0.35mm²


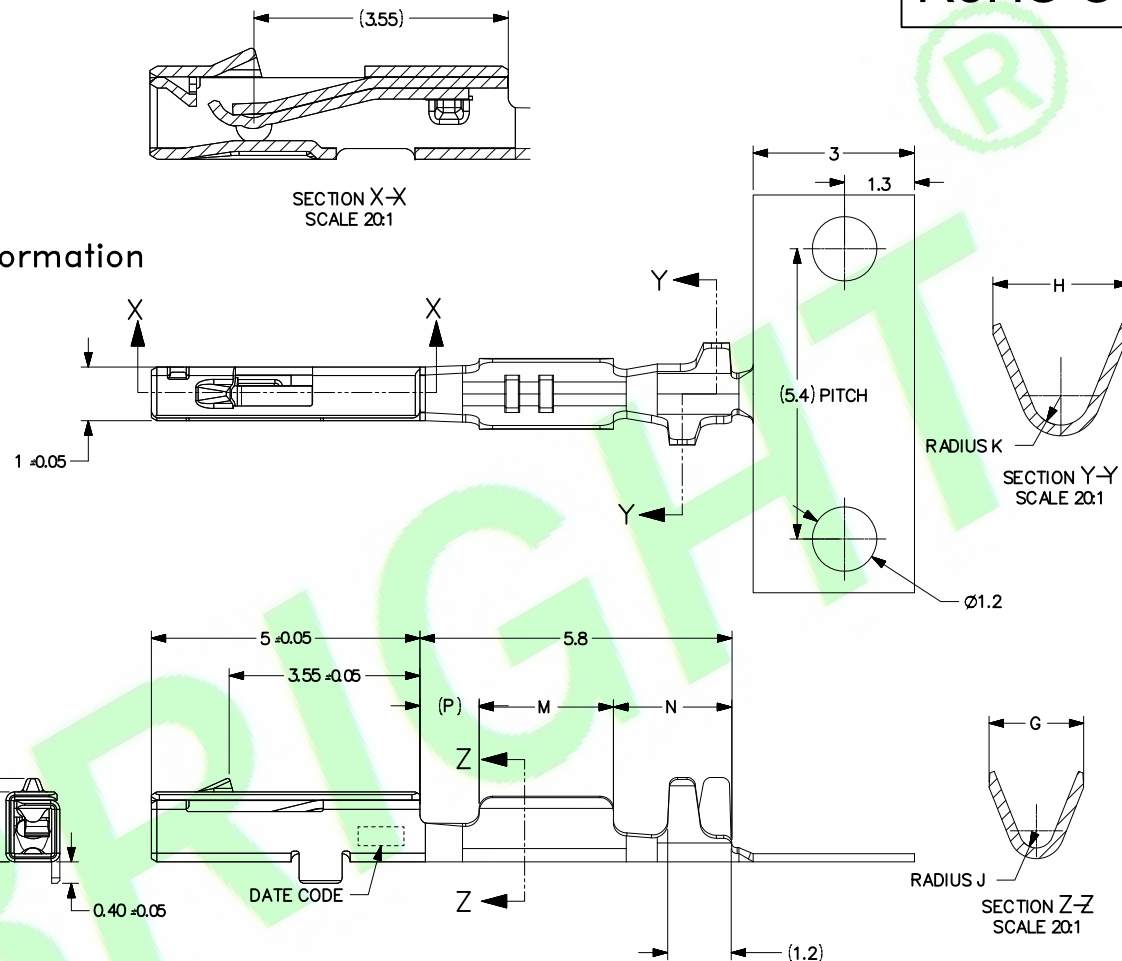


TABLE 1

PARTNUMBERS		GRIP CODE	WIRE GAGE mm ²	INSULATION MAX O.D. mm	DIM G	DIM H	DIM J	DIM K	DIM L	DIM M	DIM N	DIM P
D WIND (LEFT PAYOFF) DEFAULT	B WIND (RIGHT PAYOFF)				+0.20 -0.15	±0.20	±0.10	±0.20	±0.05	±0.10	±0.10	REF
H20062T-PQ-DM	H20062T-PQ-BM	M	0.22	1.05	1.65	2.25	0.45	0.47	0.00	2.00	2.4	1.4
H20062T-PQ-DS	H20062T-PQ-BS	S	0.13	1.05	1.32	1.90	0.24	0.41	0.00	2.50	2.2	1.1
H20062T-PQ-DL	H20062T-PQ-BL	L	0.35	1.40	1.65	2.35	0.40	0.68	0.15	2.50	2.2	1.1

5X					DR.BY.:	
4X					Sophia	
3X					CHKD.:	
2X					Ren	
1X	ORIGINAL		Sophia		APPD.:	
REV.	DESCRIPTION		DR.BY	ECN. NO.	Billy	

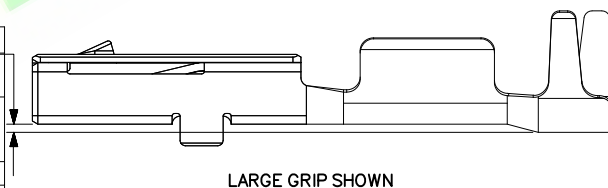

GENERAL TOLERANCE:		PART NO : H20062T-PX-XX
0.00~0.25:	±0.03	DWG. NO.:
0.25~0.50:	±0.05	
0.50~1.00:	±0.10	TITLE :2.0mm Phite CTX50 RCPT Terminal (RoHS)
1.00~10.0:	±0.20	
10.0~30.0:	±0.25	DATE: 02-Aug-2020
30.0~ :	±0.30	

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4