

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0,Color:Natural

Rating:

Current Rating:2.0 Amp

Voltage Rating:125V AC/DC


Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

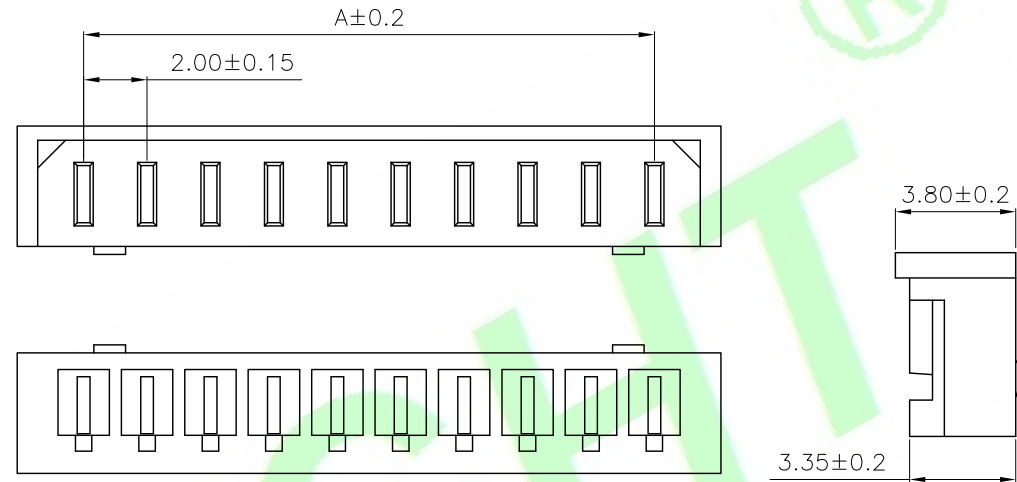

Ordering Information

H2011-XXP-A

1 2 3

- 1: — Series No.
2: — No. of Positions
3: — A:In Bag


Circuits	Dimension(mm)	
	A	B
02	2.00	5.00
03	4.00	7.00
04	6.00	9.00
05	8.00	11.00
06	10.00	13.00
07	12.00	15.00
08	14.00	17.00
09	16.00	19.00
10	18.00	21.00
11	20.00	23.00
12	22.00	25.00
13	24.00	27.00
14	26.00	29.00
15	28.00	31.00
16	30.00	33.00
17	32.00	35.00
18	34.00	37.00
19	36.00	39.00
20	38.00	41.00

5X			
4X			
3X			
2X	Update code options	Judyyan	20220926
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:	Samson
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X.X: ±5.0°
X.XX: ±0.20	X.XX: ±3.0°
X.XXX: ±0.10	X.XXX: ±2.0°
	X.XXX: ±1.0°

PART NO : H2011-XXP-A
DWG. NO.:
TITLE : 2.00mm Crimp Style Connectors
DATE: 10-Sep-2014

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
SCALE: 1:1		
UNIT: mm		