RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:Natural

Rating:

Current Rating:3.0 Amp (24AWG)

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

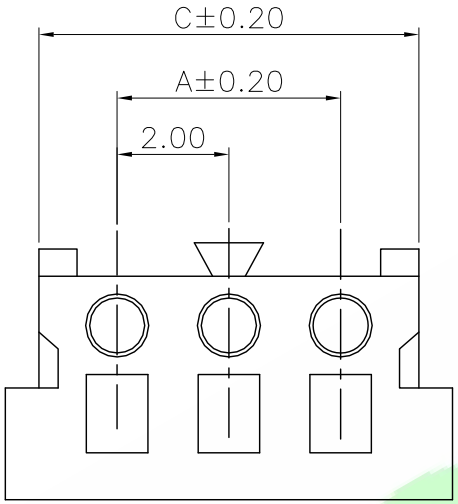

Poles	Dimensions (mm)		
	A	B	C
02P	/	6.00	4.80
03P	4.00	8.00	6.80
04P	6.00	10.00	8.80
5P	8.00	12.00	10.80
6P	10.00	14.00	12.80
7P	12.00	16.00	14.80
8P	14.00	18.00	16.80
9P	16.00	20.00	18.80
10P	18.00	22.00	20.80
11P	20.00	24.00	22.80
12P	22.00	26.00	24.80
13P	24.00	28.00	26.80
14P	26.00	30.00	28.80
15P	28.00	32.00	30.80

Ordering Information

H2013-XXP-A

1 2 3

1: —— Series No.

2: —— No. of Positions

3: —— Q:Tin Plated

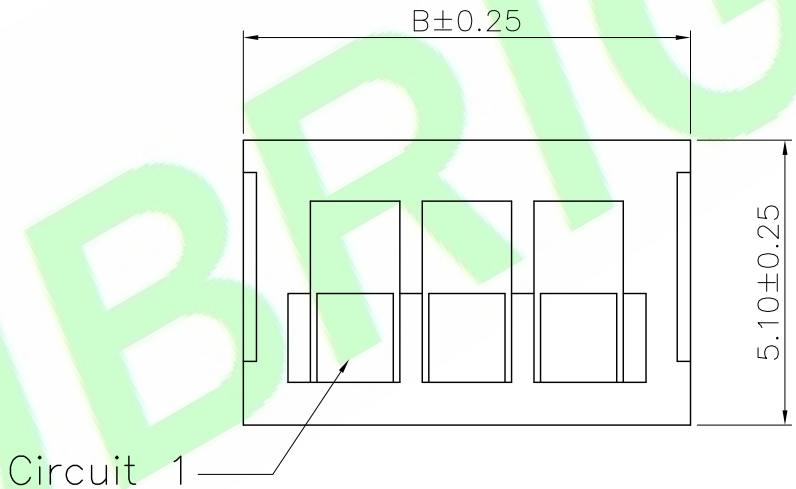

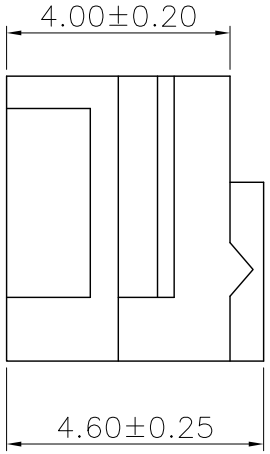

REV.	DESCRIPTION	DR.BY	ECN. NO.
5X			
4X			
3X			
2X	Update code options	Judyyan	20220927
1X	ORIGINAL	Samson	

DR.BY.: Samson

CHKD.: Tony

APPD.: Billy

GENERAL TOLERANCE:

LINEAR		ANGLES	
X.:	±0.30	X°:	±5.0°
X.X:	±0.20	X.X°:	±3.0°
X.XX:	±0.15	X.XX°:	±2.0°
X.XXX:	±0.10	X.XXX°:	±1.0°

PART NO : H2013-XXP-A

DWG. NO.:

TITLE : 2.0mm Pitch Housing

DATE: 28-Nov-2011

HJBRIGHT® 東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm

THIRD ANGLE PROJECTION

A4

HJBRIGHT