

Specifications:**Material And Finish:**

Insulator: Phosphor Bronze

Rating:

Current Rating: 3.0 Amp (24AWG)

Voltage Rating: 125V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$ **Electrical:**

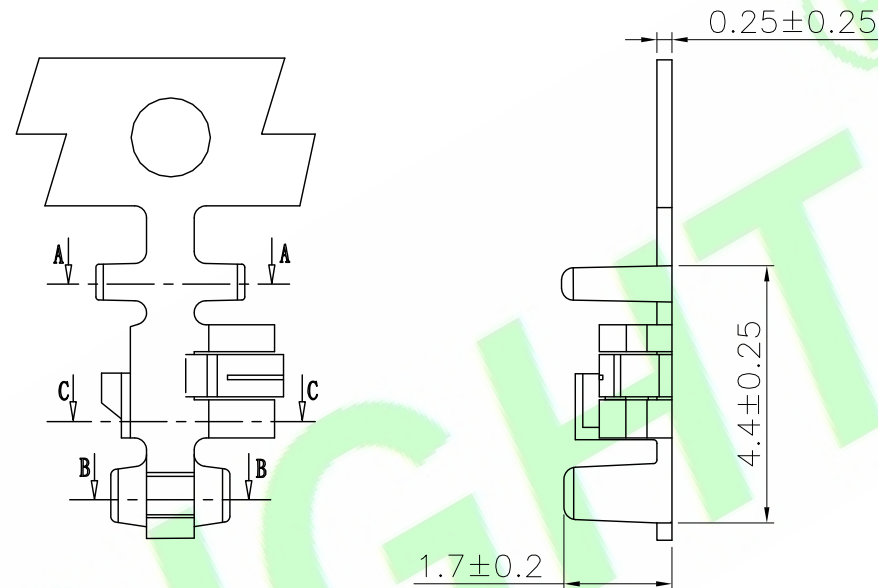
Contact resistance: 20m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 500V AC/Minute

Wire Range: AWG#22~26

Insulation O.D: 1.50mm Max


Section A-ASection B-BSection C-C**Ordering Information**H2013T-PX

1 2 3

1: — Series No.

2: — T: Terminal

3: — Q: Tin Plated

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H2013T-PX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR ANGLES		DWG. NO.:				
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Terminal		SHEET: 1/1		A4
2X	Update code options	Judyyan	20220927	x.x: ±0.20	x.x': ±3.0°	SCALE: 1:1					
1X	ORIGINAL	Samson		x.xx: ±0.15	x.xx': ±2.0°	UNIT: mm					
REV.	DESCRIPTION	DR.BY	ECN. NO.	APPD.: Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 28-Nov-2011				