

RoHS Compliant



Specifications:
 Material And Finish:
 Insulator:Nylon 66 UL94V-0
 Color:Natural(White)

Rating:
 Current Rating:2A AC,DC
 Voltage Rating:250V AC,DC
 Temperature Range:-25°C~+85°C



Electrical:
 Contact Resistance: 20mΩ Max
 Insulation Resistance:1000MΩ Min
 Withstanding Voltage:800V AC/minute

Ordering Information
 H2017S-1XXP-01-234-XA


- 1:— Series No.
- 2:— No. of Positions
- 3:— N:Natural(White)
- 4:— A:In Bag

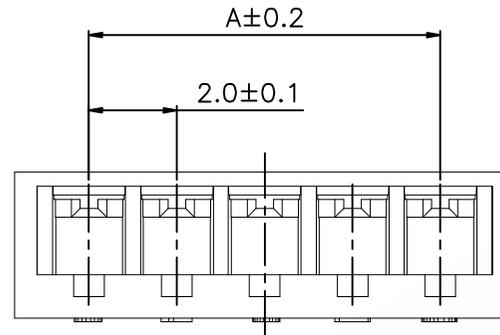


4P Add slots
on both sides

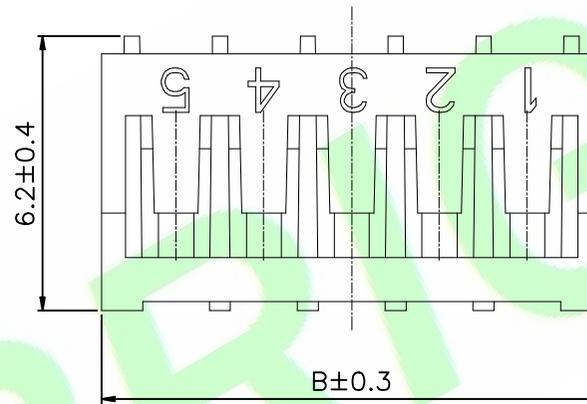

No.	Dimensions(mm)	
	A	B
02	2.00	5.40
03	4.00	7.40
04	6.00	9.40
05	8.00	11.40
06	10.00	13.40
07	12.00	15.40
08	14.00	17.40
09	16.00	19.40
10	18.00	21.40
11	20.00	23.40
12	22.00	25.40
13	24.00	27.40
14	26.00	29.40
15	28.00	31.40
16	30.00	33.40

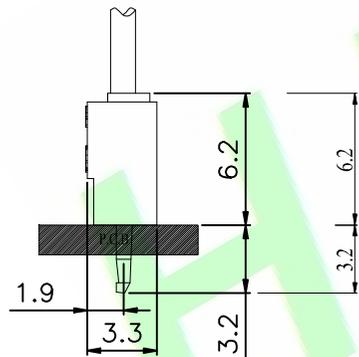

ASSEMBLY LAYOUT(REF)

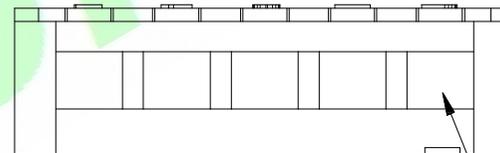


PIN 1

DR.BY: Judyyan	GENERAL TOLERANCE:		PART NO : H2017S-XXP-01-XA	
CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:	
APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE :	
	X.X: ±0.20	X.X': ±3.0°	2.00mm Pitch Housing 180°	
	X.XX: ±0.10	X.XX': ±2.0°	DATE: 11-Oct-2023	
	X.XXX: ±0.10	X.XXX': ±1.0°		

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.