

Specifications:

Material And Finish:

Insulator: PA66/PBT UL94V-0 Color: Natural

See ordering Information

Rating:

Current Rating: 3.0 Amp(22AWG)

Voltage Rating: 125V AC/DC

Temperature Range: -40°C~+105°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 500V AC/Minute

Ordering Information

H2018-XXP-XX-A

1 2 3 4 5

1: — Series No.

2: — No. of Positions

3: — Material:

P: PBT



L: PA66

4: — Color:

N= Natural



B= Black

5: — A: In Bag

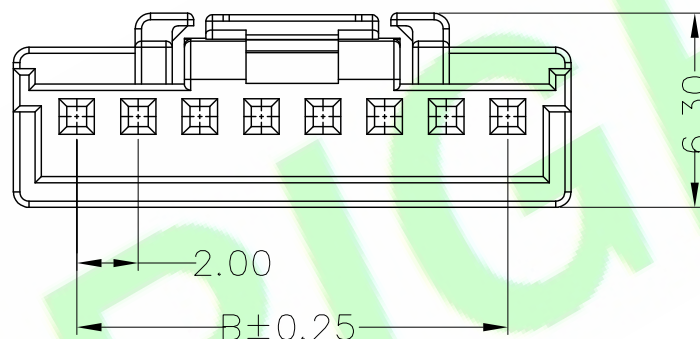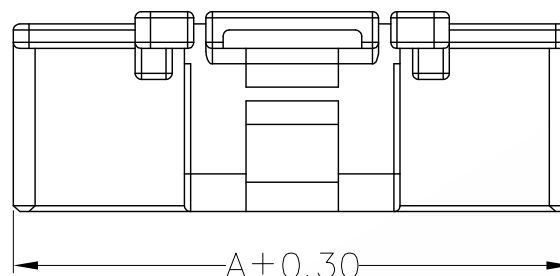


05P~15P Shape

Scale 1:1

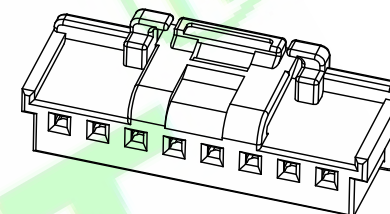


Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02P	8.00	2.00	09P	20.10	16.00
03P	8.10	4.00	10P	22.10	18.00
04P	10.10	6.00	11P	24.10	20.00
05P	12.10	8.00	12P	26.10	22.00
06P	14.10	10.00	13P	28.10	24.00
07P	16.10	12.00	14P	30.10	26.00
08P	18.10	14.00	15P	32.10	28.00



03P~04P Shape

Scale 0.8:1



02P Shape

Scale 0.8:1



5X				DR.BY:	
4X				Sophia	
3X				CHKD.:	
2X	Update code options	Judyann	20220801	Ren	
1X	ORIGINAL	Sophia		APPD.:	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±0.30	X.X: ±5.0°
X.X: ±0.20	X.X: ±3.0°
X.XX: ±0.10	X.XX: ±2.0°
X.XXX: ±0.10	X.XXX: ±1.0°

PART NO. : H2018-XXP-XX-A
DWG. NO.:
TITLE : 2.00mm Crimp Style Connectors
DATE: 30-Oct-2020

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4