

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Rating:

Current Rating:3.0 Amp

Voltage Rating:125V AC/DC


Temperature Range:-40°C~+125°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage: 0V AC/Minute

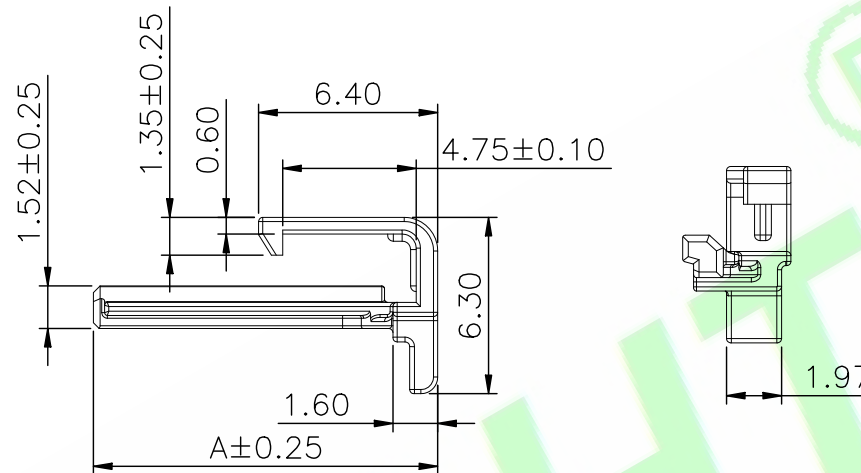



Circuits	A
2	6.30
3	8.30
4	10.30
5	12.30
6	14.30
7	16.30
8	18.30
9	20.30
10	22.30
11	24.30
12	26.30
13	28.30
14	30.30

Ordering Information

H2019-XXP-KA

1 2 3 4

- 1: — Series No.
 2: — No. of Positions
 3: — K:Snap-fit
 4: — A:In Bag

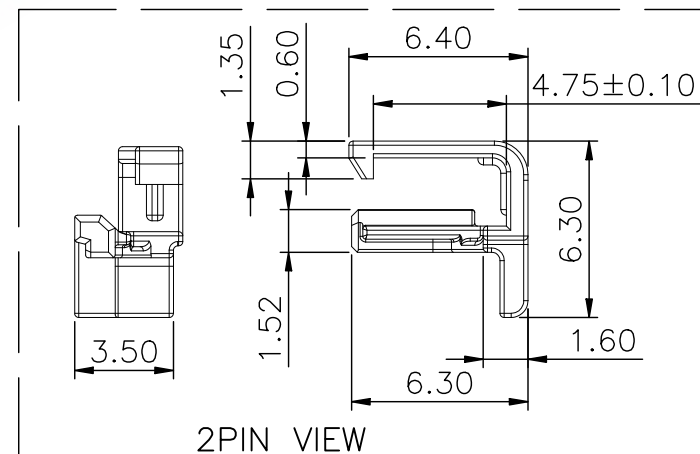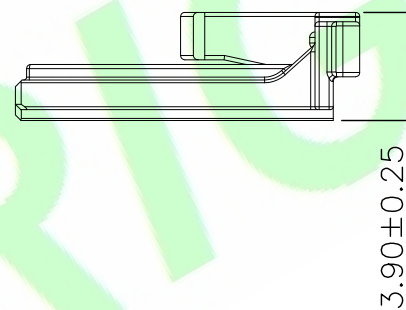

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H2019-XXP-KA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			 THIRD ANGLE PROJECTION	A4
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:						
3X				CHKD.:	x.:	x°: ±5.0°	TITLE : 2.00mm Pitch Housing Snap-fit		SHEET: 1/1				
2X				Aren	x.x: ±0.30	x.x°: ±3.0°			SCALE: 1:1				
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.25	x.xx°: ±2.0°			UNIT: mm				
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx°: ±1.0°	DATE: 20-Jul-2021						