

Specifications:
Material And Finish:
Insulator:PBT UL94V-0








Rating:
Current Rating:3.0 Amp
Voltage Rating:125V AC/DC
Temperature Range:-40°C~+125°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage: 0V AC/Minute

Ordering Information



H2019-XXP-XA
1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — Color:
N:Natural
B:Black
4: — A:In Bag

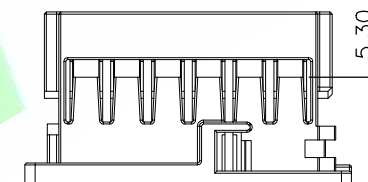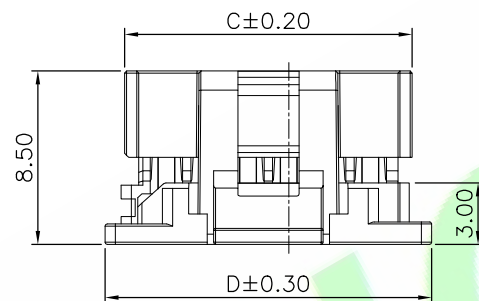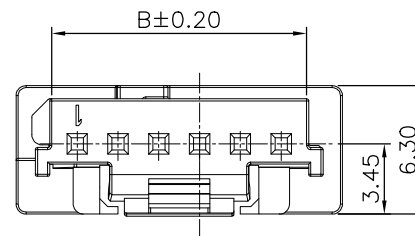

2-6P/13-16P

7-12P VIEW

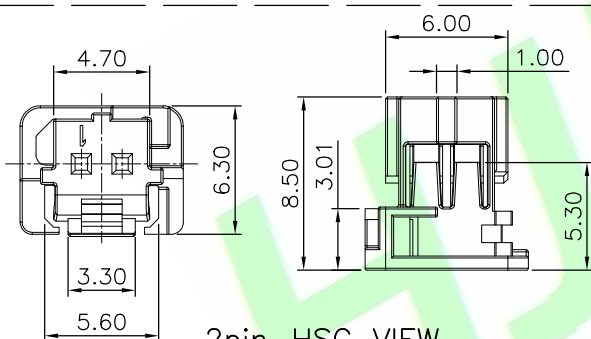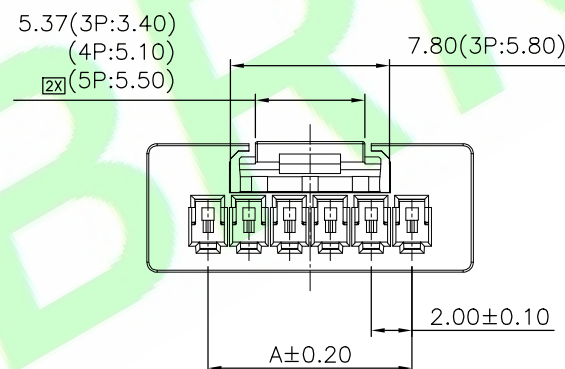

2pin_HSG VIEW

Circuits	A	B	C	D
2	2.00	4.70	6.10	8.00
3	4.00	6.70	8.10	10.00
4	6.00	8.70	10.10	12.00
5	8.00	10.70	12.10	14.00
6	10.00	12.70	14.10	16.00
7	12.00	14.70	16.10	18.00
8	14.00	16.70	18.10	20.00
9	16.00	18.70	20.10	22.00
10	18.00	20.70	22.10	24.00
11	20.00	22.70	24.10	26.00
12	22.00	24.70	26.10	28.00
13	24.00	26.70	28.10	30.00
14	26.00	28.70	30.10	32.00
15	28.00	30.70	32.10	34.00
16	30.00	32.70	34.10	36.00

5X			
4X			
3X			
2X	Update 5P size	Judyyan	20241217
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:	
CHKD.: Aren	LINEAR	ANGLES
APPD.: Billy	x.: ±0.30	x': ±5.0°
	x.xx: ±0.20	x.x': ±3.0°
	x.xxx: ±0.10	x.x.x': ±2.0°
		x.x.x.x': ±1.0°

PART NO : H2019-XXP-XA
DWG. NO.:
TITLE : 2.00mm Crimp Style Connectors
DATE: 20-Jul-2021

		10	30.00	52.75	54.75	55.50
HJBRIGHT®		東莞市華晶電子有限公司				
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
SHEET:	1/1					A4
SCALE:	1:1					
UNIT:	mm					
		THIRD ANGLE PROJECTION				