

Specifications:
Material And Finish:
Insulator:PBT UL94V-0
Color:Black




Rating:
Current Rating:3.0 Amp(20AWG)
Voltage Rating:125V AC/DC
Operating Temperature Range:-55~+105°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
H20200F-XXP-01-BA
1 2 3 4 5

- 1:— Series No.
2:— F:Female Housing
3:— No. of Positions
4:— B:Black
5:— A:In Bag


Circuit No.	Dimensions		
	A	B	C
10P	8.00	11.00	12.60
18P	16.00	19.00	20.60
20P	18.00	21.00	22.60
22P	20.00	23.00	24.60
24P	22.00	25.00	26.60
26P	24.00	27.00	28.60
28P	26.00	29.00	30.60
30P	28.00	31.00	32.60
32P	30.00	33.00	34.60
34P	32.00	35.00	36.60
40P	38.00	41.00	42.60

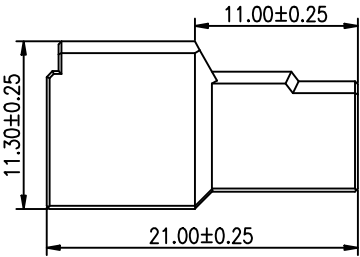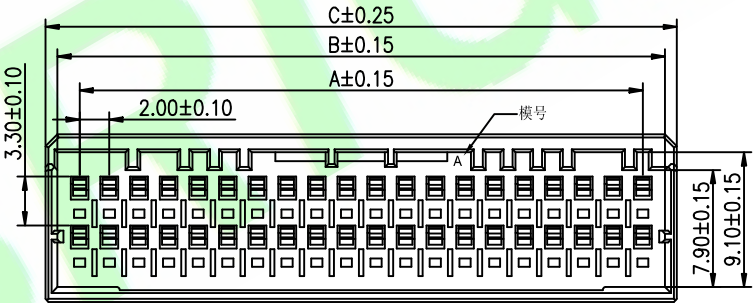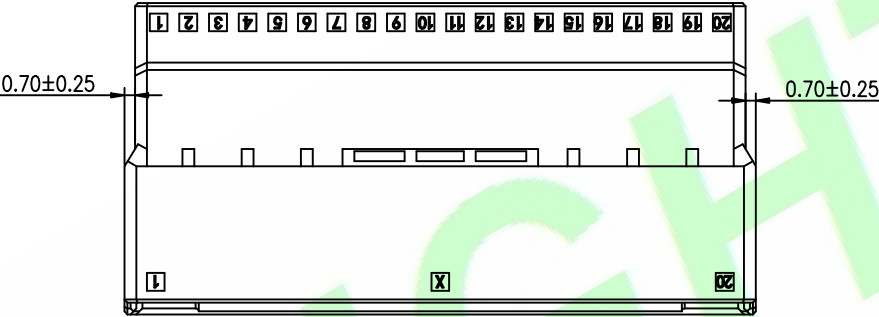

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H20200F-XXP-01-BA	
4X				Aren	LINEAR	ANGLES	DWG. NO.:	
3X				CHKD.:	X.: ±0.40	X': ±5.0°	TITLE :	
2X				Aren	X.X: ±0.30	X.X': ±3.0°	Double-row 2.0 pitch Wafer JACK	
1X	ORIGINAL	Aren		APPD.:	X.XX: ±0.20	X.XX': ±2.0°	DATE:	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	UNIT: mm	


HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2
SCALE: 1:1
UNIT: mm




THIRD ANGLE PROJECTION


A4

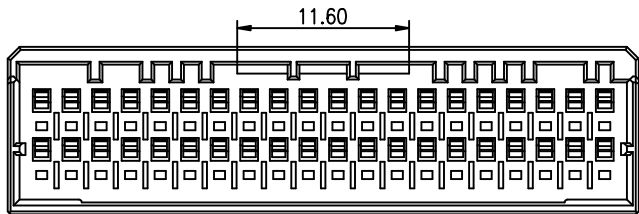


40P

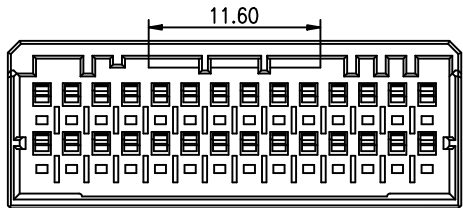


28P

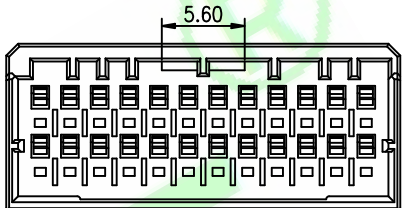


24P

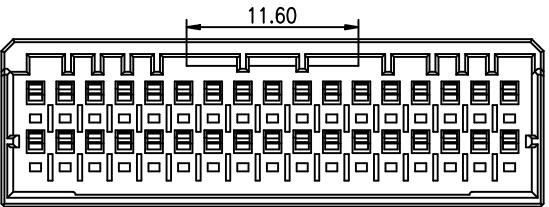


34P

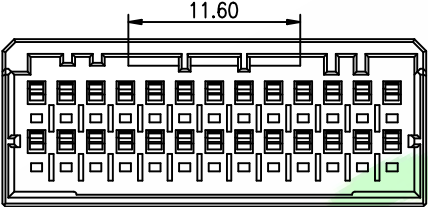


26P




20P

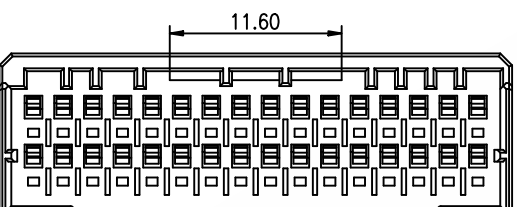


32P

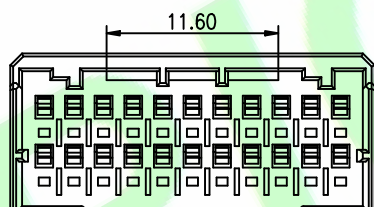


22P



18P

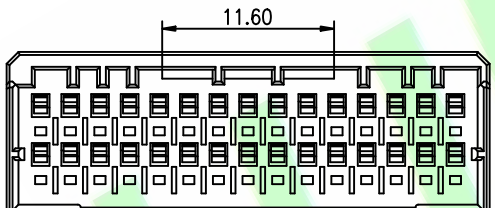

30P



10P

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Aren	
CHKD.: Aren	
APPD.: Billy	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.40	X': ±5.0°
X.X: ±0.30	X.X': ±3.0°
X.XX: ±0.20	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : H20200F-XXP-01-BA
DWG. NO.:
TITLE : Double-row 2.0 pitch Wafer JACK
DATE:

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/2
SCALE: 1:1
UNIT: mm


THIRD ANGLE PROJECTION

A4