

RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA66 UL94V-0
Color:Black



Rating:
Current Rating:6.5 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-25°~+85°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute



Ordering Information

H2022-XXP-01-A
1 2 3

- 1: — Series No.
2: — No. of Positions
3: — A:In Bag

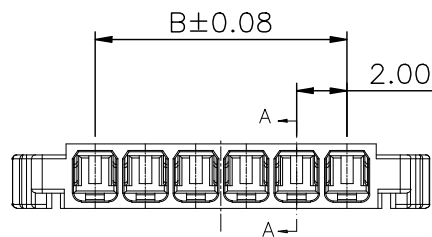

SECTION A-A

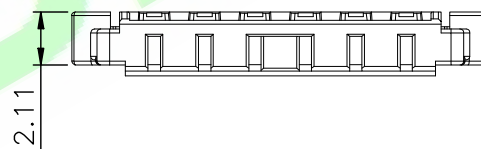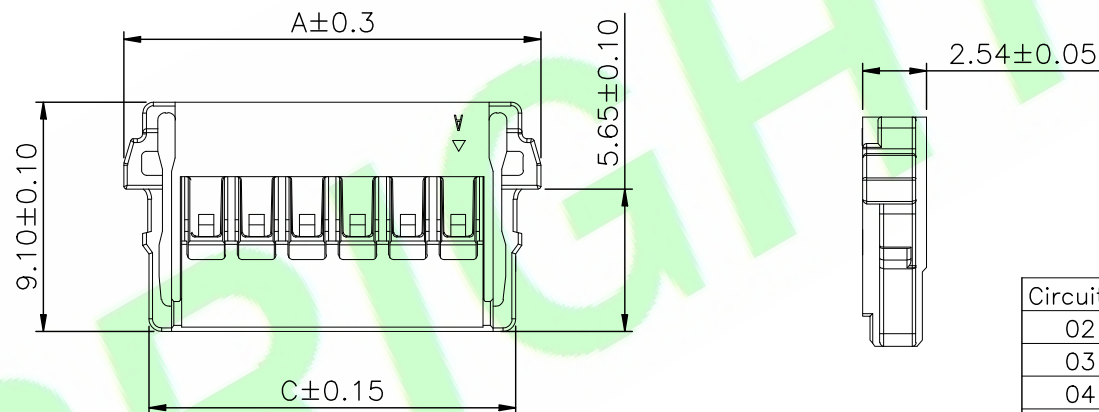

Circuits	A	B	C
02	8.55	2.00	6.55
03	10.55	4.00	8.55
04	12.55	6.00	10.55
05	14.55	8.00	12.55
06	16.55	10.00	14.55
07	18.55	12.00	16.55
08	20.55	14.00	18.55
09	22.55	16.00	20.55
10	24.55	18.00	22.55
11	26.55	20.00	24.55
12	28.55	22.00	26.55
13	30.55	24.00	28.55
14	32.55	26.00	30.55
15	34.55	28.00	32.55
16	36.55	30.00	34.55

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H2022-XXP-01-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				A4
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Aren	x.: ±	x': ±5.0°	TITLE : 2.0mm Pitch Housing	SHEET: 1/1				
2X					x.x: ±0.30	x.x': ±3.0°		SCALE: 1:1				
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°		UNIT: mm				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 22-Aug-2021	THIRD ANGLE PROJECTION				