

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0 Color:BLACK

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:650V AC/Minute

Ordering Information





H20230-XXP-01-A

1 2 3




1: — Series No.

2: — No. of Positions

3: — In bag

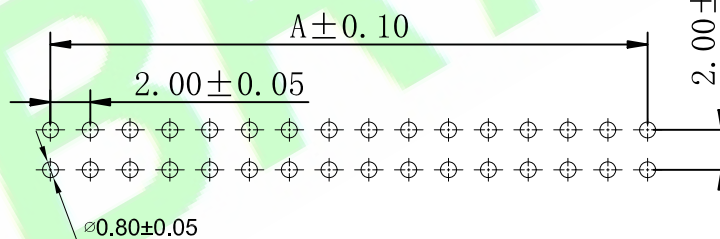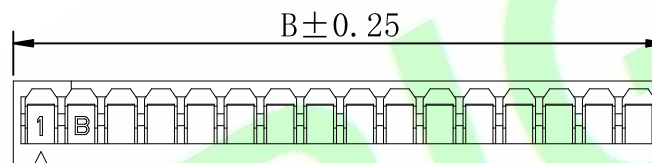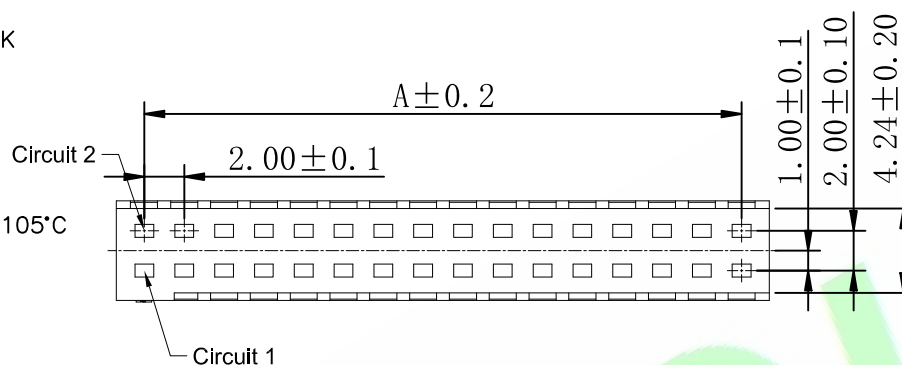

P.C.B LAYOUT

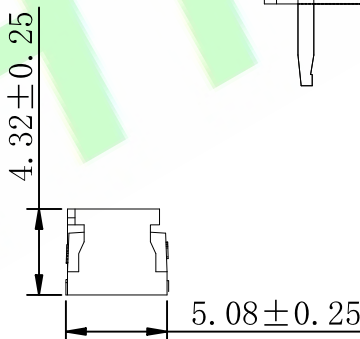

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.00	4.80	2x10P	18.00	20.80
2x3P	4.00	6.80	2x11P	20.00	22.80
2x4P	6.00	8.80	2x12P	22.00	24.80
2x5P	8.00	10.80	2x13P	24.00	26.80
2x6P	10.00	12.80	2x14P	26.00	28.80
2x7P	12.00	14.80	2x15P	28.00	30.80
2x8P	14.00	16.80	2x16P	30.00	32.80
2x9P	16.00	18.80			

5X				DR.BY.: Yuki	GENERAL TOLERANCE:		PART NO : H20230-XXP-01-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Aren	x.: ±0.30	x': ±5.0°	TITLE : 2.0 Pitch Housing		SHEET: 1/1			A4
2X					x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Yuki		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 11-Oct-2023		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°						