

Specifications:

Material And Finish:

Insulator:PPE UL94V-0 Color:Gray

Rating:

Current Rating:3.0 Amp

Voltage Rating:50V AC/DC

Operating Temperature Range:-40°~+85°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.




Withstanding Voltage:1000V AC/Minute

Ordering Information

H22010-XXP-01-XXA

1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — 01:Black
02:Gray
4: — A:In Bag

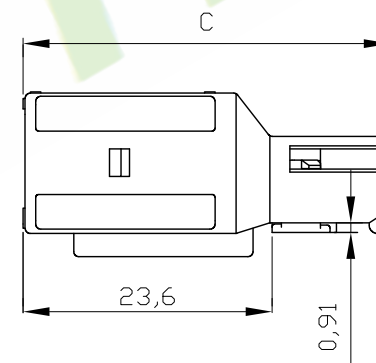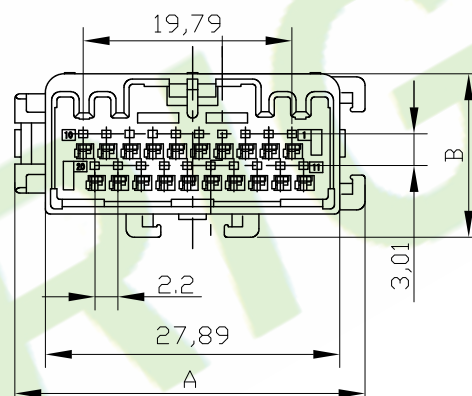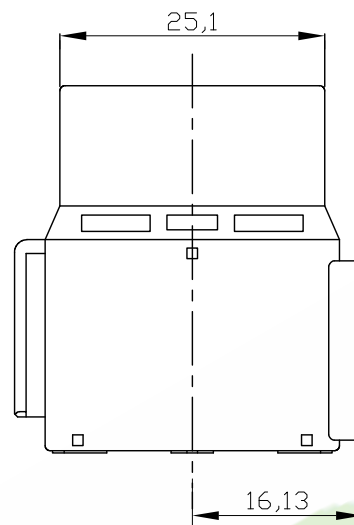

Poles	Dimensions(mm)		
	A	B	C
12	24.2	15.6	34.8
16	28.6		
20	33		

5X			
4X			
3X			
2X			
1X	ORIGINAL	Samson	20230523
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Samson
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X.X: ±5.0°
X.XX: ±0.20	X.XX: ±3.0°
X.XXX: ±0.10	X.XXX: ±2.0°
	X.XXX: ±1.0°

PART NO : H22010-XXP-01-XXA
DWG. NO.:
TITLE : 2.2 mm HOUSING CONNECTOR
DATE: 10-Oct-2017

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4