

Specifications:

Material :

Insulator: PBT UL94V-0



Color: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Insulator resistance: 100M ohm min.


Withstanding Voltage: 1000V AC/Minute

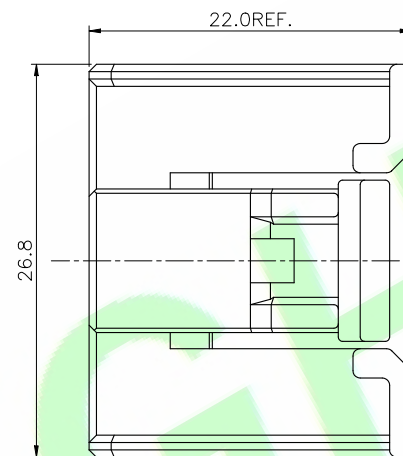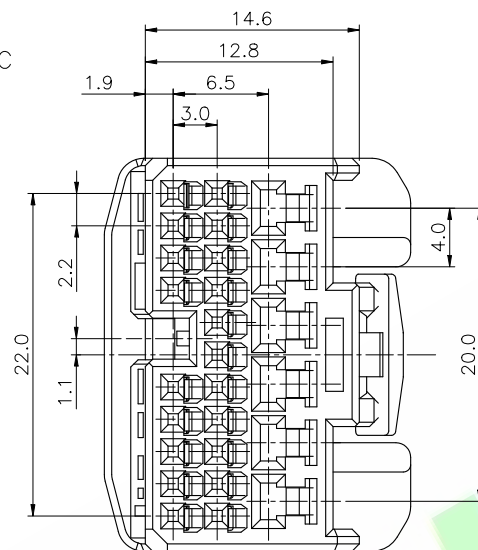

Ordering Information

H22300M-26P-01-XA
1 2 3 4 5

- 1: — Series No.
2: — M: Male Housing
3: — No. of Positions
4: — N: Natural
B: Black
5: — A: In Bag

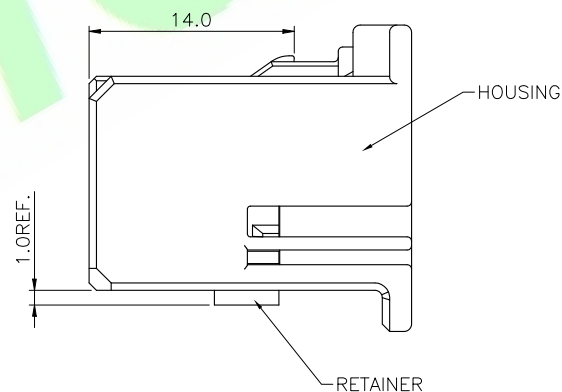

5X			
4X			
3X			
2X			
1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Hu.CH
CHKD.: Sam
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.10	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : H22300M-26P-01-XA
DWG. NO.:
TITLE : 26 POSITION PLUG ASSEMBLY
DATE: 12-May-2022

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4