

Specifications:**Material And Finish:**

Insulator:PA46 UL94V-0

Rating:

Current Rating:5.5Amp (20AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°C~+125°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering InformationH25000-XXP-XX-A

1 2 3 4

1:—Series No.

2:—No. of Positions

3:—01: A Type Black

02: B Type Natural

4:—A:Bag

No.	Dimension mm	
	A	B
4	7.70	2.50
6	10.20	5.00
8	12.70	7.50
10	15.20	10.00
12	17.70	12.50
14	20.20	15.00
16	22.70	17.50

4 CKT

6 CKT





8 CKT

10 CKT

12 CKT

14 CKT

16 CKT

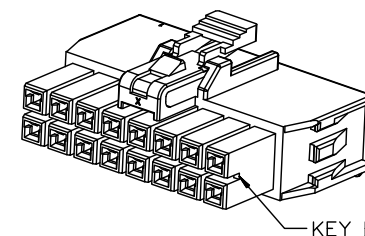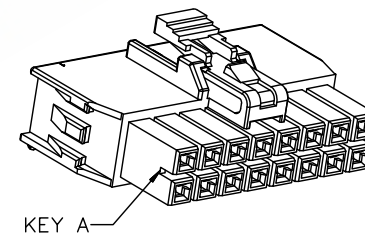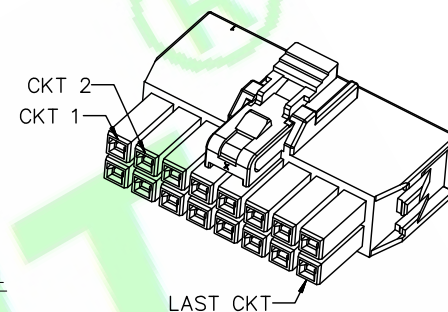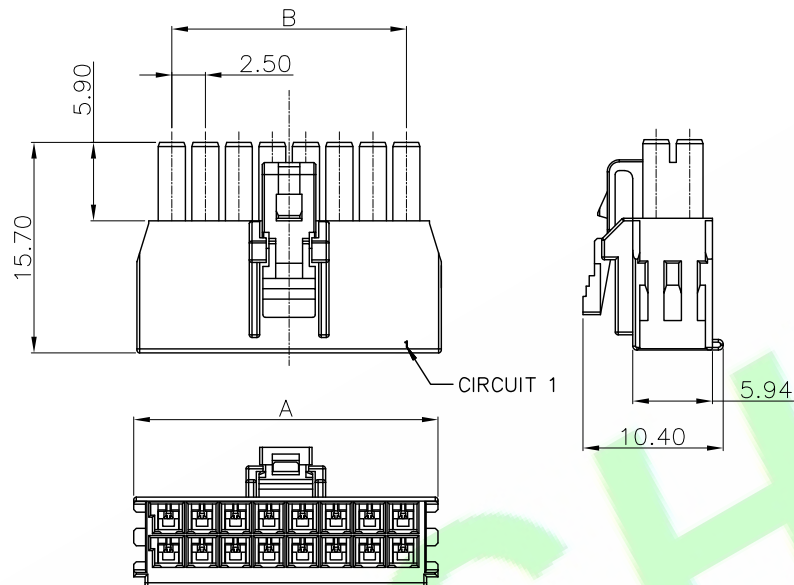

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H25000-XXP-XX-A
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE :
2X				Tony	X.X: ±0.20	X.X': ±3.0°	2.5mm Pitch Wafer For Housing
1X	ORIGINAL	Judyyan		APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 11-Jul-2019
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	

HJBRIGHT® 东莞市華晶电子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4