
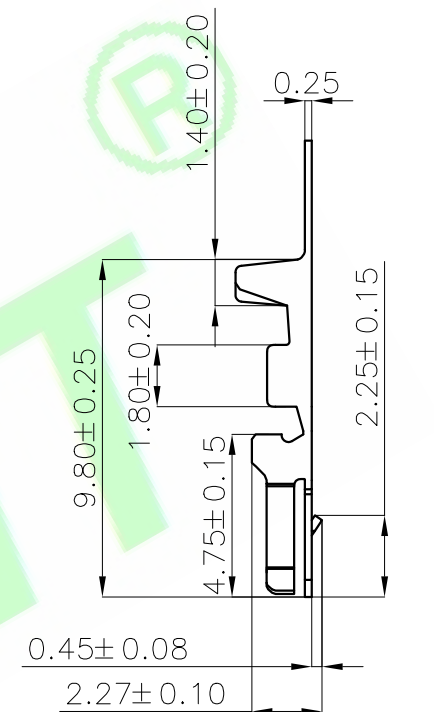


Material:
Terminal: Phosphor Bronze
Wire Range: AWG#24~28

Rating:
Current Rating: 3.0 Amp
Voltage Rating: 250V AC/DC
Operating Temperature Range: $-25^{\circ}\sim +85^{\circ}\text{C}$
Contact Resistance: $30\text{m}\Omega$ Max
Insulation Resistance $1000\text{M}\Omega$ Min
Withstanding Voltage: 800V AC/minute

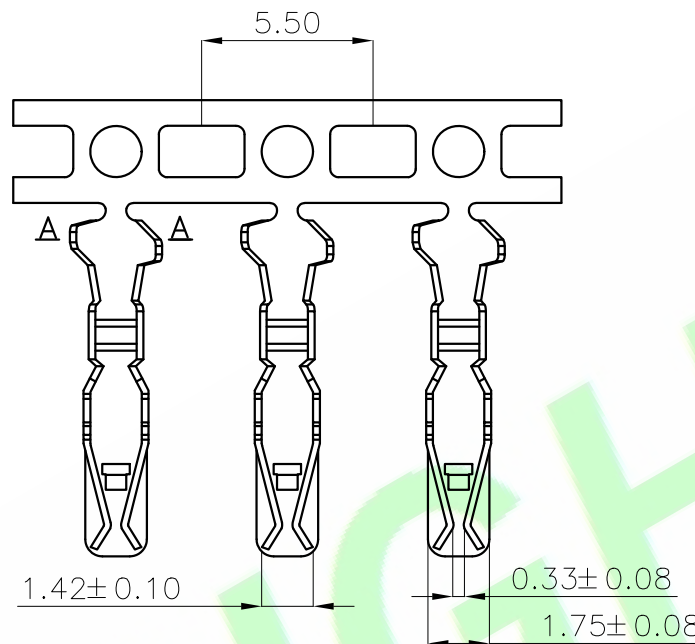


Ordering Information


H25001T-PX

1 2 3


- 1: — Series No.
2: — T: Terminal
3: — A: Gold flash

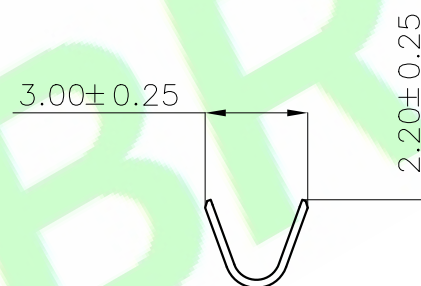

SEC:A-A

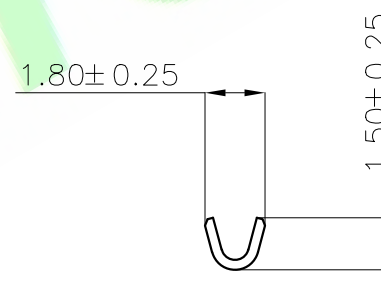

SEC:B-B




SEC:C-C

1X	ORIGINAL	Anne	
REV.	DESCRIPTION	DR.BY	ECN. NO

DR.BY.: Anne	GENERAL TOLERANCE:		PART NO : H25001T-PX	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	x.:	x': $\pm 2'$	TITLE :	
	x.x: ± 0.25	x.x':	2.5mm Pitch Terminal	
APPD.: Billy	x.xx: ± 0.20	x.xx':	DATE: 02-Nov-2024	
	x.xxx: ± 0.10	x.xxx':		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4