

Specifications:

Material And Finish:

Insulator:PBT Color:Black

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp(20AWG)

Voltage Rating:12V AC/DC

Operating Temperature Range:-30°~+105°C

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V /Max

Ordering Information




H25009-XX-01-A

1 2 3

1: — Series No.

2: — No. of Positions

3: — A:In bag

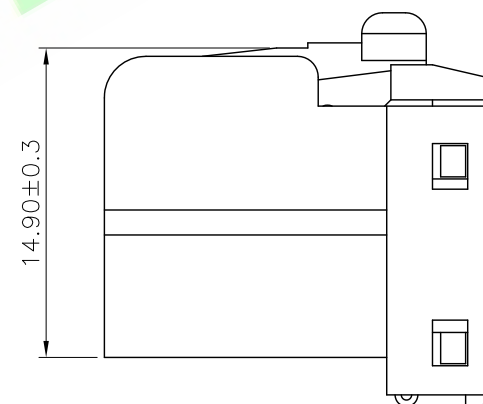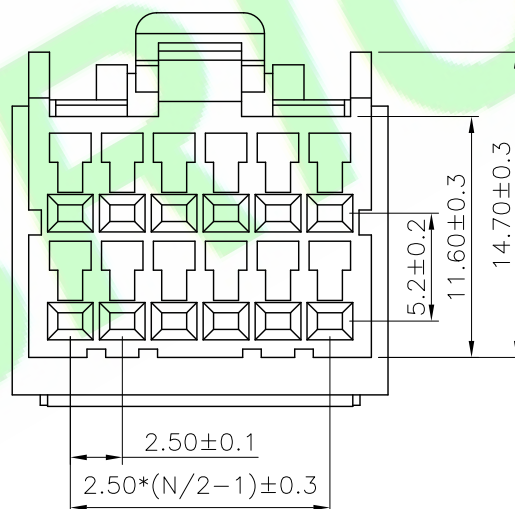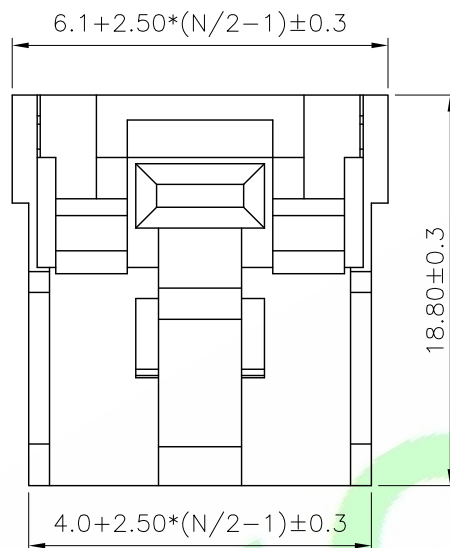

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H25009-XX-01-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X						LINEAR	ANGLES	DWG. NO.:				
3X	Update code options	Judyyan	20220726	CHKD.: Tony	x.:	x°: ±5.0°	TITLE : 2.50mm MULTILOCK I/O Connector System Housing Assembly		SHEET: 1/1			A4
2X	依实物修正图纸	Aaron	20171121		x.x: ±0.30	x.x°: ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Kenry		APPD.:	x.xx: ±0.20	x.xx°: ±2.0°	DATE: 10-Aug-2016		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx°: ±1.0°						