

Terminal: Phosphor Bronze

Current Rating:3.0 Amp(22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Contact resistance:10m Ohm Max

Insulator resistance:1000M Ohm min.

Withstanding Voltage:1000V AC/Minute


H2500T-PQ

$$\overline{1} \quad \overline{2} \quad \overline{3}$$

1:—Series No.

2:— T:Terminal

3:— Q: Tin Plated

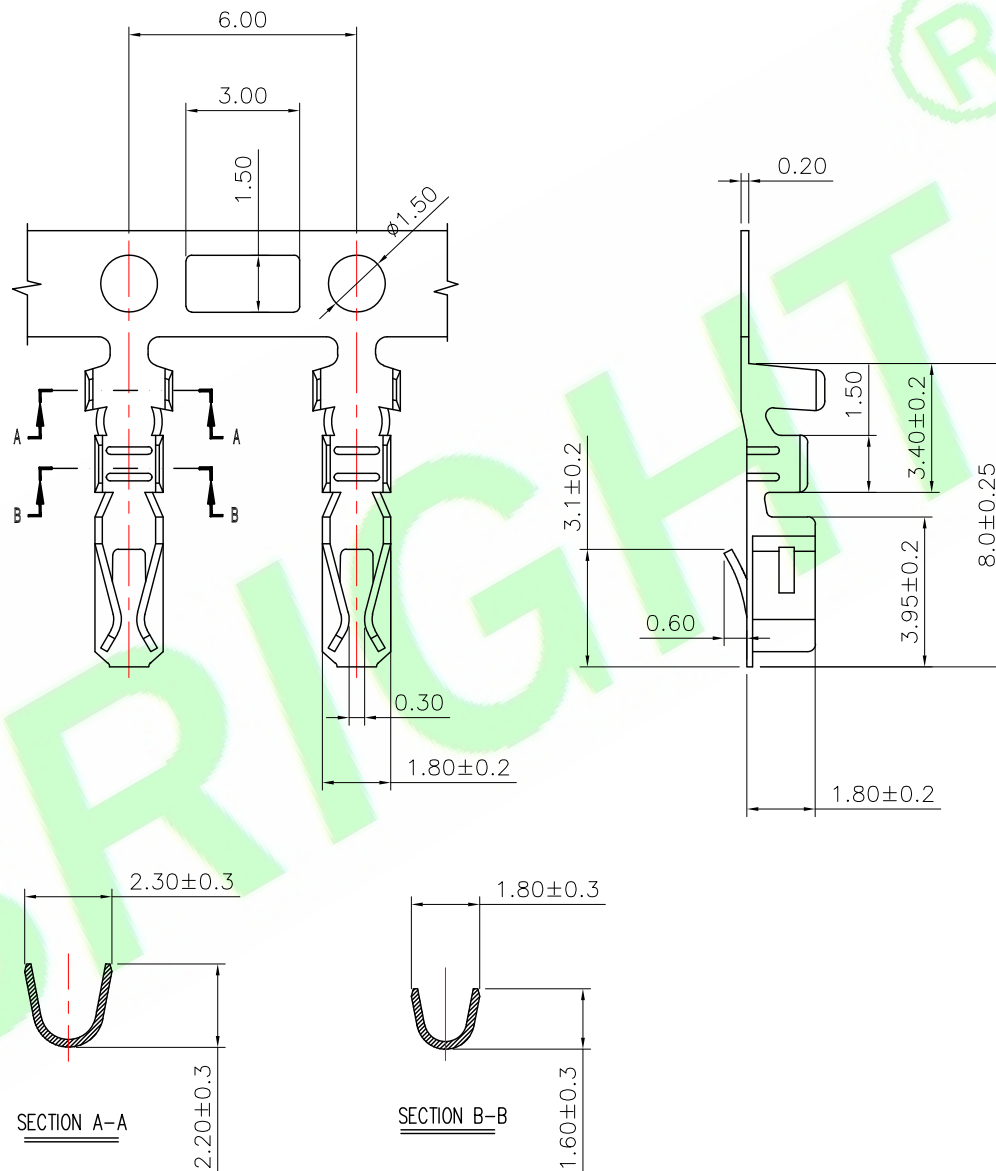

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H2500T-PQ		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				
4X					LINEAR	ANGLES	DWG. NO.:						
3X				CHKD.: Aren	x.: ±0.30	x°: ±5.0°	2.50mm Pitch Terminal		TITLE :		SHEET: 1/1		A4
2X					x.x: ±0.20	x.x°: ±3.0°			SCALE: 1:1				
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.15	x.xx°: ±2.0°			DATE: 24-Apr-2019		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx°: ±1.0°							