

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0

Rating:

Current Rating:3.0 Amp (22AWG)

Voltage Rating:250V AC/DC



Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute


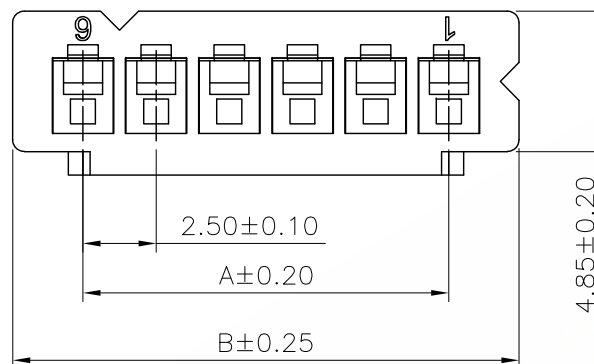


Ordering Information

H2501-XXP-01-XA

1 2 3 4

- 1: — Series No.
- 2: — No. of Positions
- 3: — N:Natural
B:Black
R:Red
L:Blue
Y:Yellow
- 4: — A:In Bag

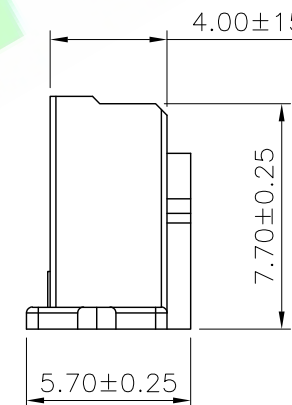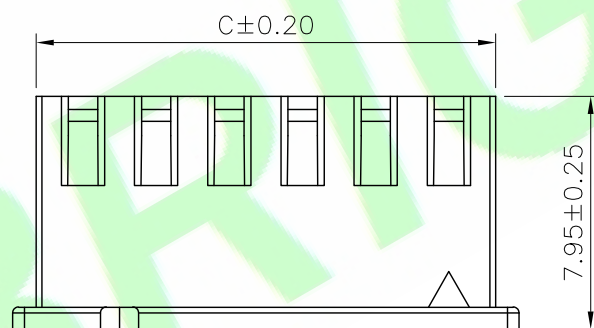

Poles	Dimensions (mm)		
	A	B	C
02P	/	7.30	5.70
03P	5.00	9.80	8.20
04P	7.50	12.30	10.70
05P	10.00	14.80	13.20
06P	12.50	17.30	15.70
07P	15.00	19.80	18.20
08P	17.50	22.30	20.70
09P	20.00	24.80	23.20
10P	22.50	27.30	25.70
11P	25.00	29.80	28.20
12P	27.50	32.30	30.70
13P	30.00	34.80	33.20
14P	32.50	37.30	35.70
15P	35.00	39.80	38.20
16P	37.50	42.30	40.70

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H2501-XXP-01-XA		HJBRIGHT ® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Tony	X.: ±5.0°	X.X: ±0.20	TITLE : 2.50mm Pitch Housing		SHEET: 1/1
2X	Update code options	Judyyan	20220923	APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 10-Mar-2016		SCALE: 1:1
1X	ORIGINAL	Samson			X.XXX: ±0.10	X.XXX': ±1.0°			UNIT: mm
REV.	DESCRIPTION	DR.BY	ECN. NO.						THIRD ANGLE PROJECTION

A4