

RoHS Compliant



Specifications:

Material And Finish:

Insulator:PBT+10GF UL94V-0

Color:See Order Information

Rating:

Current Rating:7.5Amp

Current Voltage:12V DC

Operating Temperature Range:-40°~+120°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:50M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

H25014M-04P-XX-A

1 2 3 4 5

1:—Series No.

2:—M:Male Housing





3:—No. of Positions

4:—01:A Type Black



02:B Type Brown

03:C Type Red


5:—A:In Bag

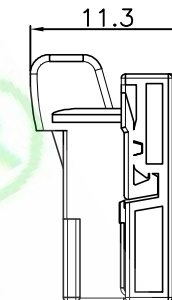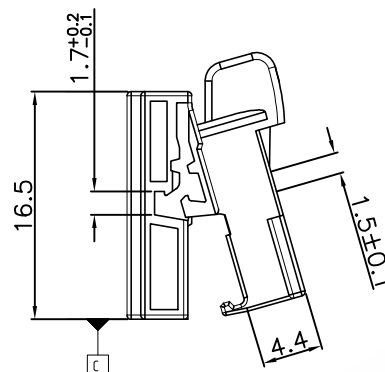


Locked Position

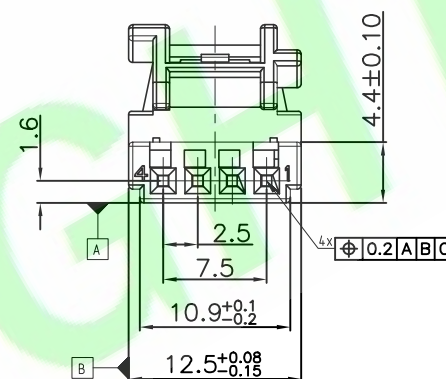


Locked Position



A Type



B Type

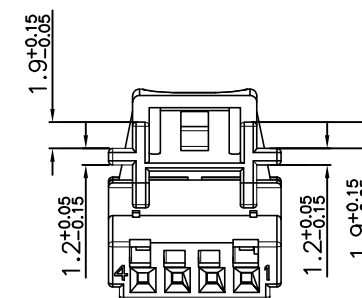


C Type

5X				DR.BY.:	Zolin
4X				CHKD.:	Aren
3X				APPD.:	Billy
2X					
1X	ORIGINAL	Zolin			
REV	DESCRIPTION	DR.BY	ECN. NO.		

GENERAL TOLERANCE:	
LINEAR	ANGLES
x.: ±0.40	x': ±5.0°
x.x: ±0.30	x.x': ±3.0°
x.xx: ±0.20	x.xx': ±2.0°
x.xxx: ±0.10	x.xxx': ±1.0°

PART NO : H25014M-04P-01-A
DWG. NO.:
TITLE : 2.5mm Pitch Male Housing 4P MQS
DATE: 19-Dec-2022

HJBRIGHT® 東莞市華晶電子有限公司	
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	
SCALE: 1:1	
UNIT: mm	
THIRD ANGLE PROJECTION	

A4

A4