

Specifications:
Material And Finish:
Insulator:Glass Filled Thermoplastic
UL94V-0 Color:Black






Rating:
Current Rating:4.0 Amp(18AWG)
Voltage Rating:250V AC/DC
Operating Temperature Range:-55°~+105°C

Electrical:
Contact Resistance:10mΩ Max
Insulation Resistance 1000MΩ Min
Withstanding Voltage:1500V AC/mlnute

Ordering Information

H25018-XXP-A

- 1:— Series No.
2:— No. of Positions
3:— A:In Pag

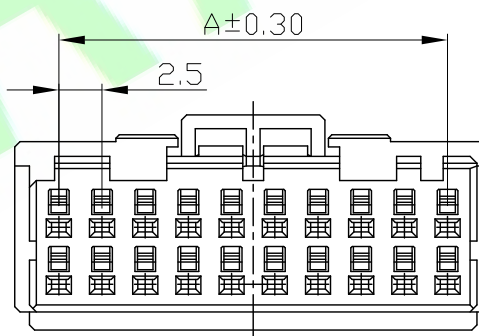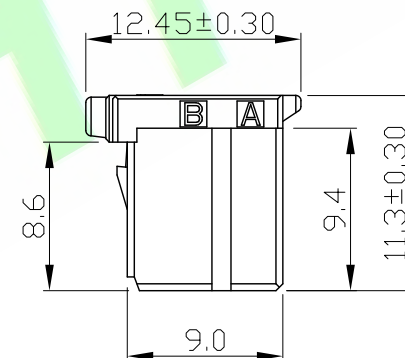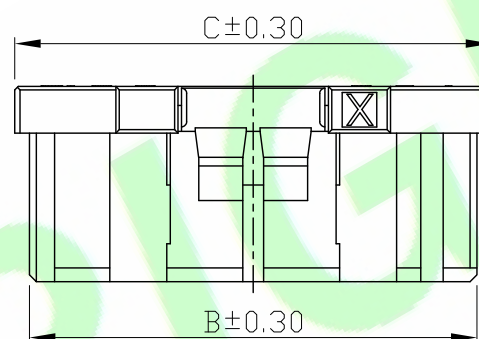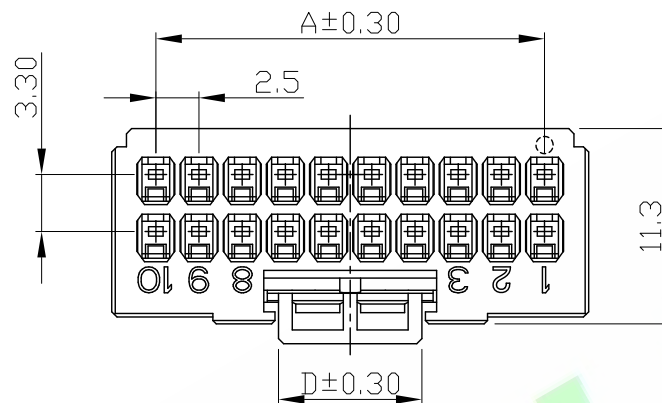

Part No.	Dimension mm			
	A	B	C	D
04P	2.50	5.90	7.60	3.10
06P	5.00	8.40	10.10	3.30
08P	7.50	10.90	12.60	3.30
10P	10.00	13.40	15.10	3.30
12P	12.50	15.90	17.60	8.30
16P	17.50	20.90	22.60	8.30
20P	22.50	25.90	27.60	8.30

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan
CHKD.: Mark
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±5.0°	X.X: ±5.0°
X.X: ±0.30	X.XX: ±3.0°
X.XX: ±0.20	X.XXX: ±2.0°
X.XXX: ±0.15	X.XXXX: ±1.0°

PART NO : H25018-XXP-A
DWG. NO.:
TITLE : 2.5mm Pitch Dynamic REC Housing
DATE: 30-Sep-2021

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4