

Specifications:

Material: Phosphor Bronze

Wire Sizes:AWG#22~30#

Insulation O.D.: 1.90mm (max)

Plating: Tin Plated

Rating:

Current Rating: 3.0 Amp(22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.


Withstanding Voltage: 1000V AC/Minute

Ordering Information


H2501T-PX


1 2 3

- 1: — Series No.
2: — T:Terminal
3: — Q:Plated Tin
A:Gold flash

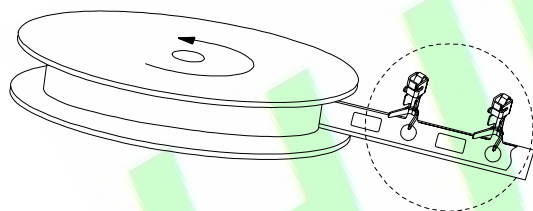

Direction of receiving material after plating

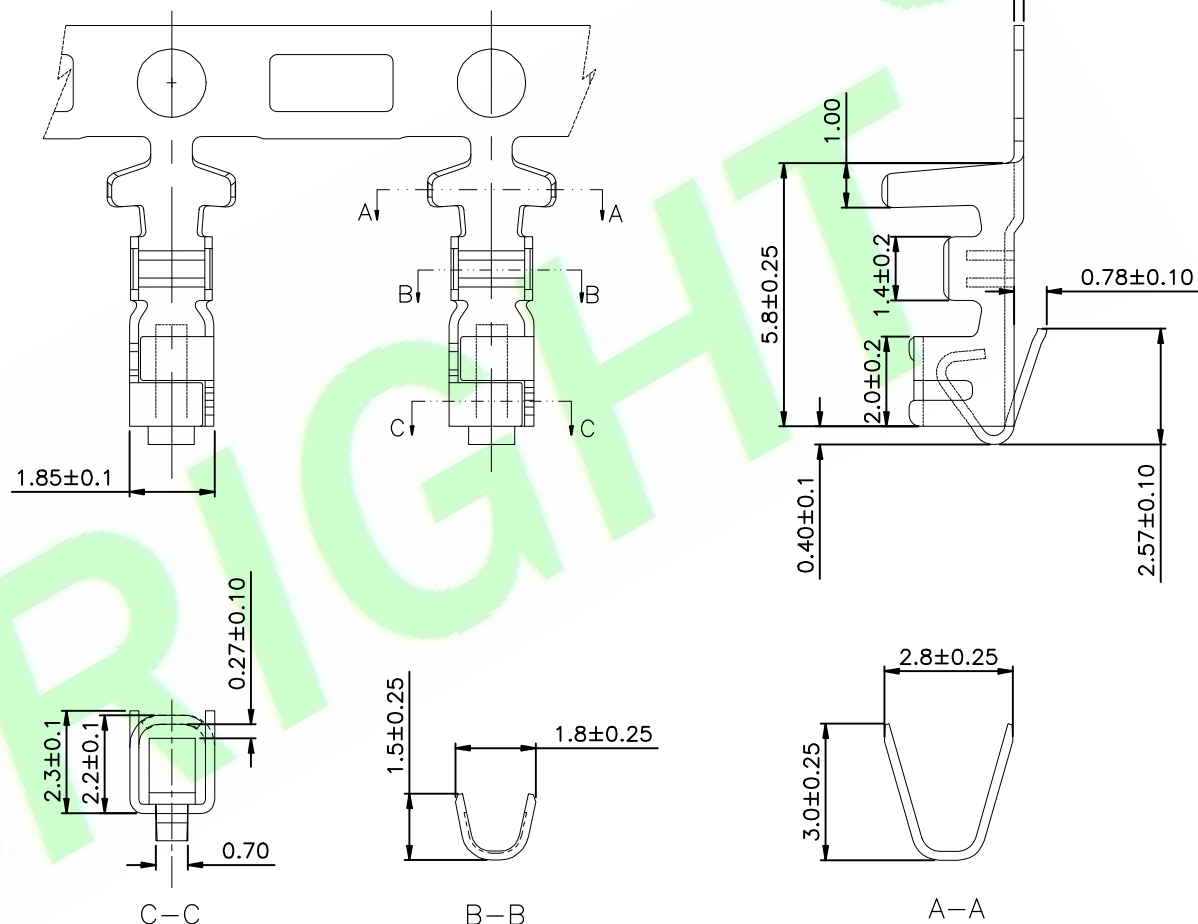

				DR.BY.: Bruce		GENERAL TOLERANCE:		PART NO : H2501T-PX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
						LINEAR		ANGLES									
						X.: ±		X': ±									
3X	Update the applicable wire diameter size	Judyyan	20250312	CHKD.: Tony		X.X: ±0.30		X.X': ±		TITLE : 2.50mm Pitch Terminal		SHEET: 1/1				A4	
2X	Update code options	Judyyan	20220923			X.XX: ±0.20		X.XX': ±				SCALE: 1:1					
1X	ORIGINAL	Bruce		APPD.: Billy		X.XXX: ±0.10		X.XXX': ±				UNIT: mm					
REV.	DESCRIPTION	DR.BY	ECN. NO.					DATE: 12-Mar-2018									
1		2		3		4		5		6		7		8			