

RoHS Compliant

Specifications:

Material And Finish:





Insulator: NL66 UL94V-V0 Color:Black
Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute

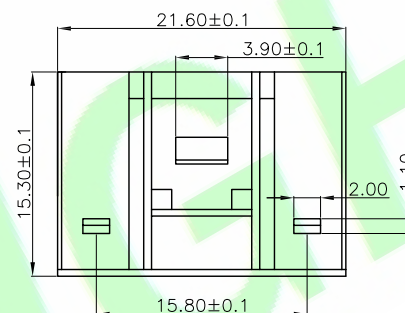

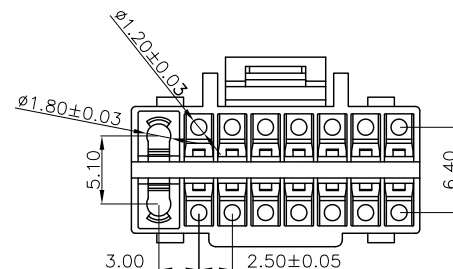


Ordering Information

H25080-XXP-BX

1 2 3 4

- 1: Series No.
- 2: No. of Positions
- 3: B:Black
- 4: A:In Bag
C:In Tray



Section B-B

5X				DR.BY.: Deng	GENERAL TOLERANCE:		PART NO : H25080-XXP-BX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			A4
4X				CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:				
3X				APPD.: Billy	±0.40	±3.0°	TITLE : 2.5mm Pitch Housing	SHEET: 1/1	THIRD ANGLE PROJECTION		
2X	ORIGINAL	Deng			X.X: ±0.30	X.X': ±3.0°	DATE: 15-Sep-2021	SCALE: 1:1			
1X	DESCRIPTION	DR.BY	ECN. NO.		X.XX: ±0.20	X.XX': ±2.0°		UNIT: mm			
REV.					X.XXX: ±0.15	X.XXX': ±1.0°					