


RoHS Compliant



Specifications:
Material And Finish:
Insulator:
Contact: Copper alloy
Plated: See Ordering Information
Wire Range: AWG#18~#24

Rating:
Current Rating: 5.0 Amp
Voltage Rating: 250V AC/DC
Operating Temperature Range: -40°~+105°C

Electrical:
Contact resistance: 20m Ohm Max
Insulator resistance: 1000M ohm min.
Withstanding Voltage: 1500V AC/Minute

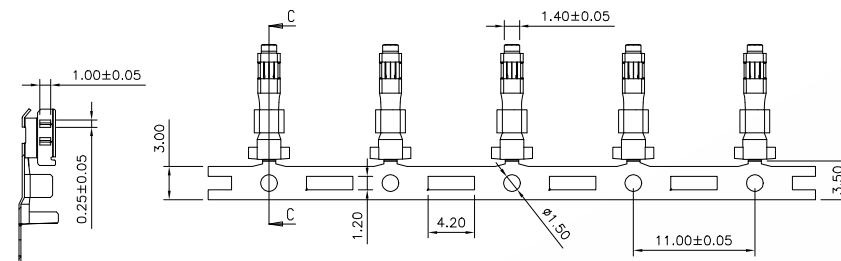


SLICE C-C

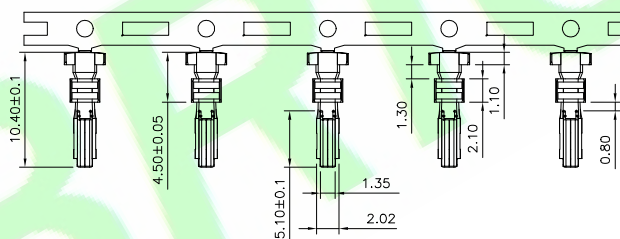


Ordering Information
H25080T-PX-02

1 2 3


- 1: Series No.
- 2: T: Terminal
- 3: A: Gold Flash
Q: Tin Plated
S: Matte Tin Plated

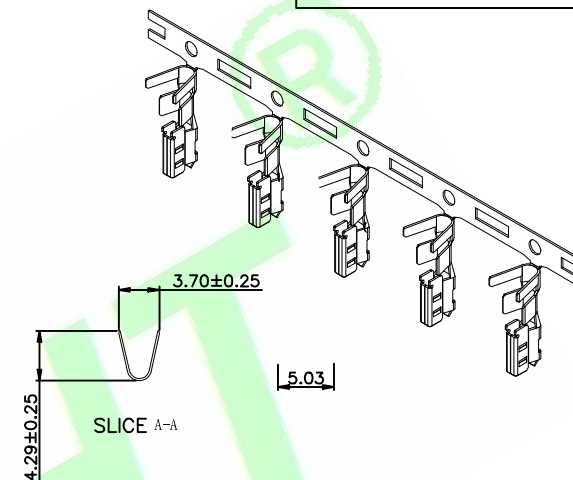

SLICE A-A

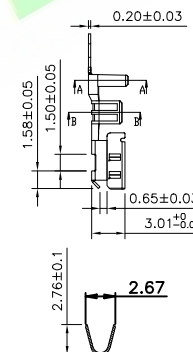

SLICE B-B

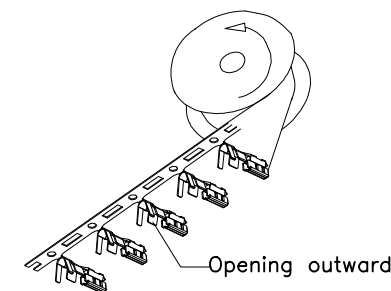

Roll direction diagram

5X				DR.BY.: Deng	GENERAL TOLERANCE:		PART NO : H25080T-PX-02	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			A4
4X				CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:				
3X				APPD.: Billy	±0.40	±3.0°	TITLE : 2.5mm Pitch Housing Terminal	SHEET: 1/1	THIRD ANGLE PROJECTION		
2X					x.x: ±0.30	x.x°: ±3.0°	DATE: 15-Sep-2021	SCALE: 1:1			
1X	ORIGINAL	Deng			x.xx: ±0.20	x.xx°: ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.15	x.xxx°: ±1.0°					