

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp (20AWG)

Voltage Rating:12V AC/DC

Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M Ohm min.

Dielectric Voltage:1000V AC/Minute

Ordering Information







H25120-12P-A


1 2 3

1: — Series No.

2: — No. of Positions

3: — A:In Bag

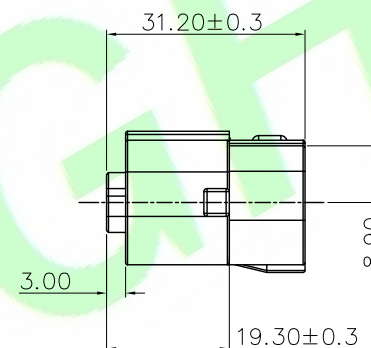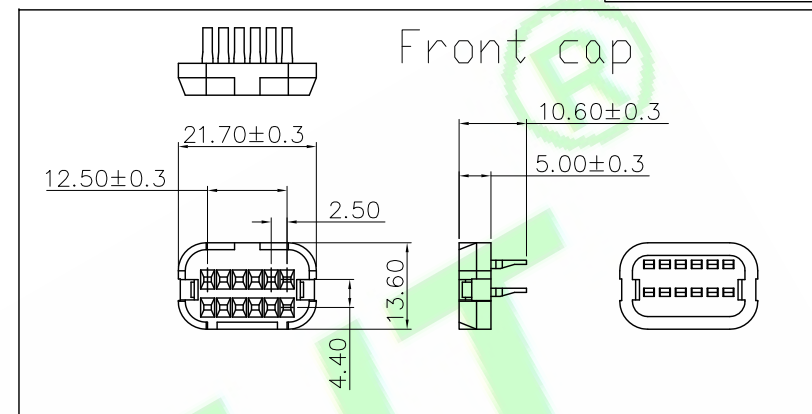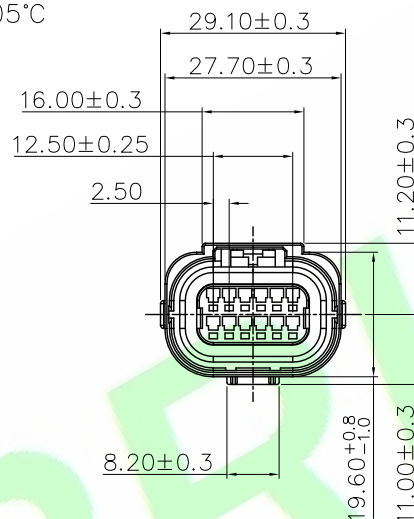

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H25120-12P-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Tony	X.: ±5.0°	X.X: ±0.30	TITLE : 2.50*4.40mm Pitch Housing	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X	Update Code options	Judyyan	20221217	APPD.: Billy	X.XX: ±0.20	X.XX: ±0.20	DATE: 26-Oct-2021	SCALE: 1:1	
1X	ORIGINAL	Tsw			X.XXX: ±0.10	X.XXX: ±1.0°		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.						

A4