

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp (20AWG)

Voltage Rating:12V AC/DC


Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max





Insulator resistance:100M Ohm min.

Dielectric Voltage:1000V AC/Minute

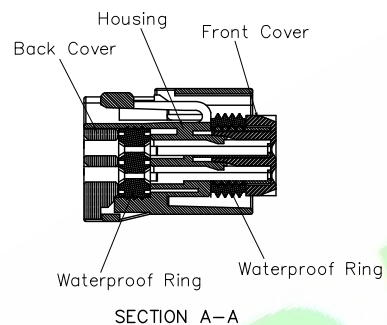**Ordering Information**
H25120-XXP-A

1 2 3

- 1: — Series No.
2: — No. of Positions
3: — A: In Bag

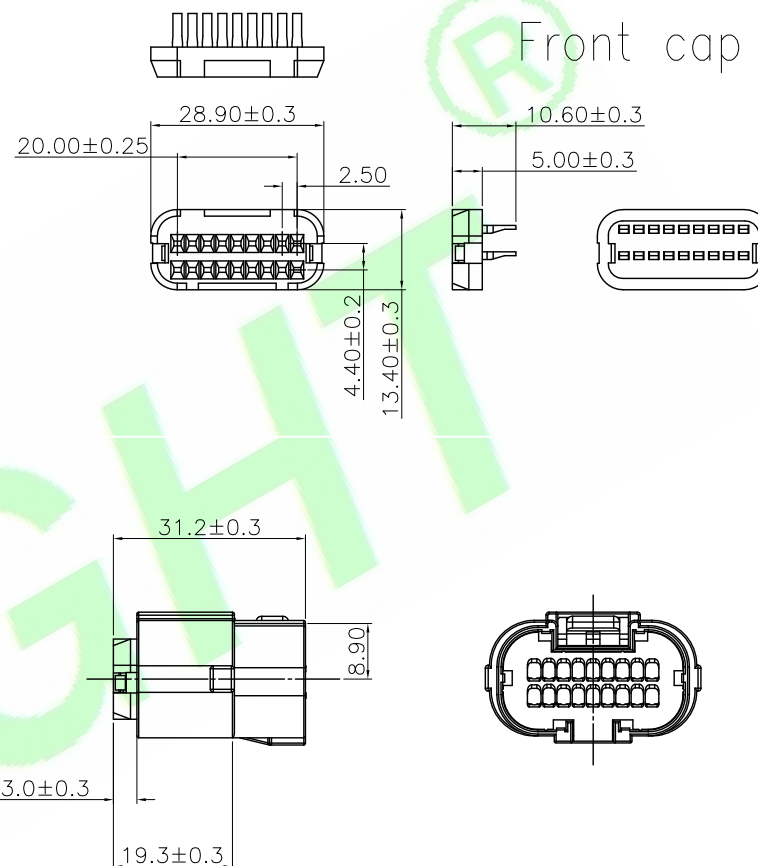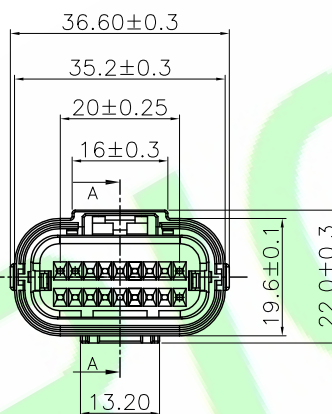

5X			
4X			
3X	Update Code options	Deng	20230530
2X	Update Code options	Judyyan	20221217
1X	ORIGINAL	Tsw	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY:	Tsw
CHKD.:	Mark
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO. : H25120-XXP-A
DWG. NO.:
TITLE : 2.50*4.40mm Pitch Housing
DATE: 26-Oct-2021

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4