

## Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Plated:See Ordering Information

## Rating:

Current Rating:3.0 Amp (20AWG)

Voltage Rating:12V AC/DC



Operating Temperature Range: -40°~+105°C

## Electrical:


Contact resistance:10m Ohm Max

Insulator resistance:100M Ohm min.




Dielectric Voltage:1000V AC/Minute



3D VIEW

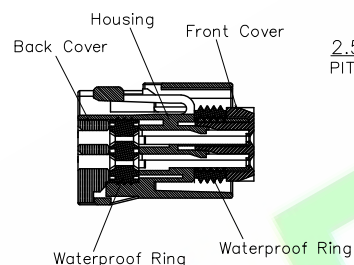

SECTION A-A

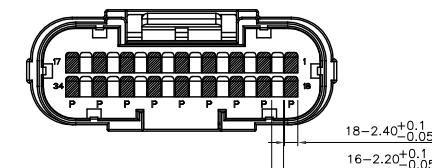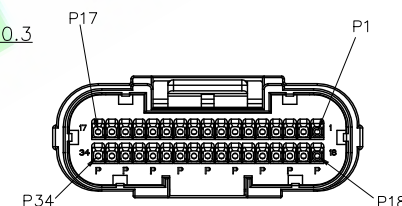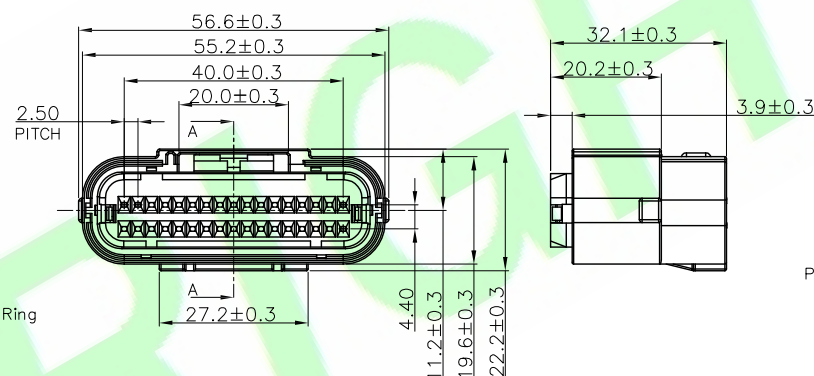

■ Applicable Wire:Insulation O.D. Ø1.4-2.3

□ Applicable Wire:Insulation O.D. Ø1.4-1.9

## Ordering Information

H25120-34P-A

1 2 3

1: — Series No.

2: — No. of Positions

3: — A:In Bag

|      |                             |         |          |
|------|-----------------------------|---------|----------|
| 5X   |                             |         |          |
| 4X   |                             |         |          |
| 3X   | Update technical parameters | Deng    | 20230530 |
| 2X   | Update Code options         | Judyyan | 20221217 |
| 1X   | ORIGINAL                    | Tsw     |          |
| REV. | DESCRIPTION                 | DR.BY   | ECN. NO. |

DR.BY:  
Tsw  
CHKD.:  
Mark  
APPD.:  
Billy

| GENERAL TOLERANCE: |               |
|--------------------|---------------|
| LINEAR             | ANGLES        |
| X.: ±0.30          | X': ±5.0°     |
| X.X: ±0.20         | X.X': ±3.0°   |
| X.XX: ±0.15        | X.XX': ±2.0°  |
| X.XXX: ±0.10       | X.XXX': ±1.0° |

|                                      |
|--------------------------------------|
| PART NO : H25120-XXP-A               |
| DWG. NO.:                            |
| TITLE :<br>2.50*4.40mm Pitch Housing |
| DATE: 26-Oct-2021                    |

HJBRIGHT® 东莞市華晶電子有限公司

BRIGHT-E ELECTRONIC

SHEET: 1/1

SCALE: 1:1

UNIT: mm

TECHNOLOGY  
LIMITED

THIRD ANGLE PROJECTION

A4