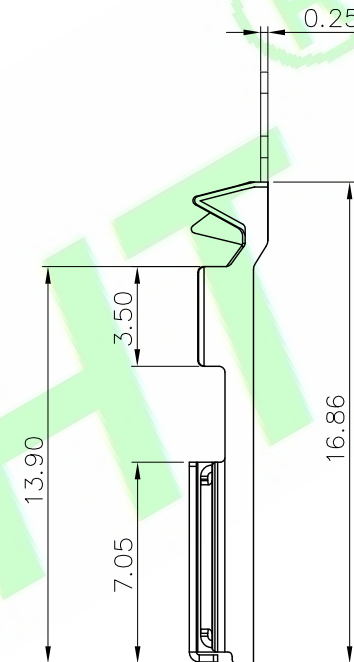
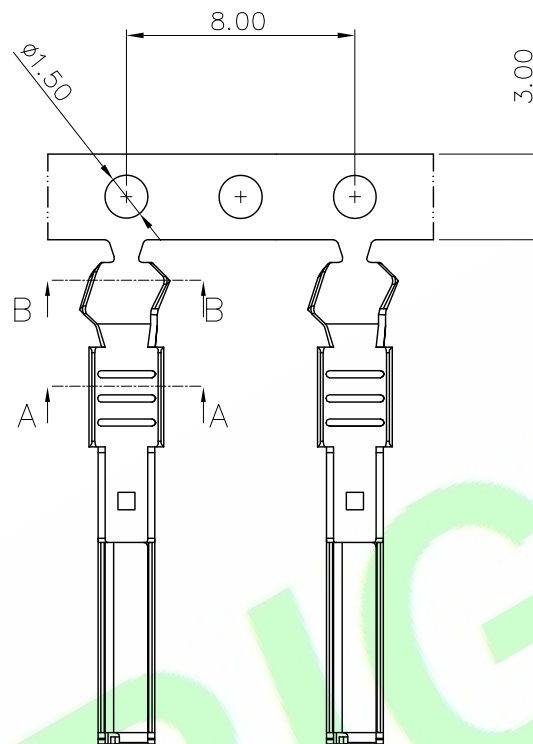


Specifications:

Material: Phosphoric copper

Plated: Tin plating

Insulation O.D: $\phi 1.4 \sim 1.9$ Insulation O.D: $\phi 1.4 \sim 2.3$ 

Ordering Information

H25120T-PX-XX


1 2 3 4

1: — Series No.

2: — T: Terminal


3: — A: Gold flash

Q: Plated Tin

4: — 01: O.D. $\phi 1.4 \sim 1.9$ 02: O.D. $\phi 1.4 \sim 2.3$ 


01: Type

SECTION A-A



02: Type

SECTION A-A



SECTION B-B

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : H25120T-PX-XX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm THIRD ANGLE PROJECTION A4		
4X					CHKD.: Mark	LINEAR	ANGLES			
3X				APPD.: Billy		x.: ±0.30	x': ±5.0°			
2X	Update Code options	Judyyan	20221217		x.x: ±0.20	x.x': ±3.0°				
1X	ORIGINAL	Samson			x.xx: ±0.15	x.xx': ±2.0°				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 26-Oct-2021			