


Insulator: PA66 UL94V-0

Current Rating: 3.0 Amp (22AWG)
Voltage Rating: 250V AC/DC
Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Contact resistance:10m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:1500V AC/Minute
Male rubber shell with female terminal

H2513M-XXP-XA

1: —Series No.
2: —M: Male Housing
3: —No. of Positions
4: —W: White
B: Black
5: —A: Bag

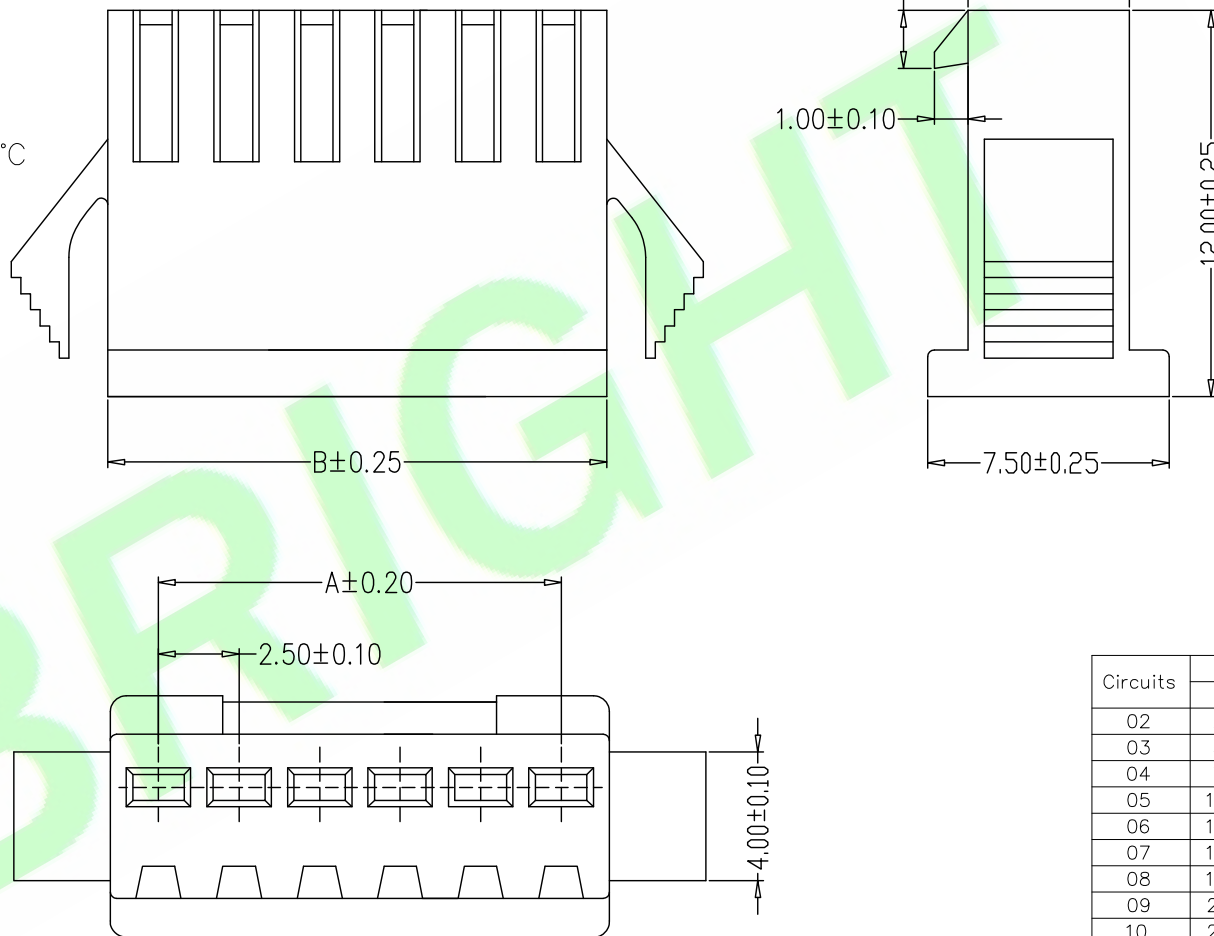

Circuits	Dimension mm	
	A	B
02	2.50	5.50
03	5.00	8.00
04	7.50	10.50
05	10.00	13.00
06	12.50	15.50
07	15.00	18.00
08	17.50	20.50
09	20.00	23.00
10	22.50	25.50
11	25.00	28.00
12	27.50	30.50
15	35.00	38.00

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H2513M-XXP-XA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: Tony	x.: ±0.30	x*: ±5.0°	TITLE : 2.50mm Pitch Male Housing			
2X	New code options	Judyyan	20220722			x.x: ±0.20		x.x*: ±3.0°	SCALE: 1:1	
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx*: ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx*: ±1.0°	DATE: 23-Oct-2013			