

Specifications:

Material: Phosphoric copper

Applicable wire sizes: AWG#22~28#

Rating:

Current Rating: 3.0 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 500M ohm min.

Withstanding Voltage: 1500V AC/Minute

Female terminal with male rubber shell

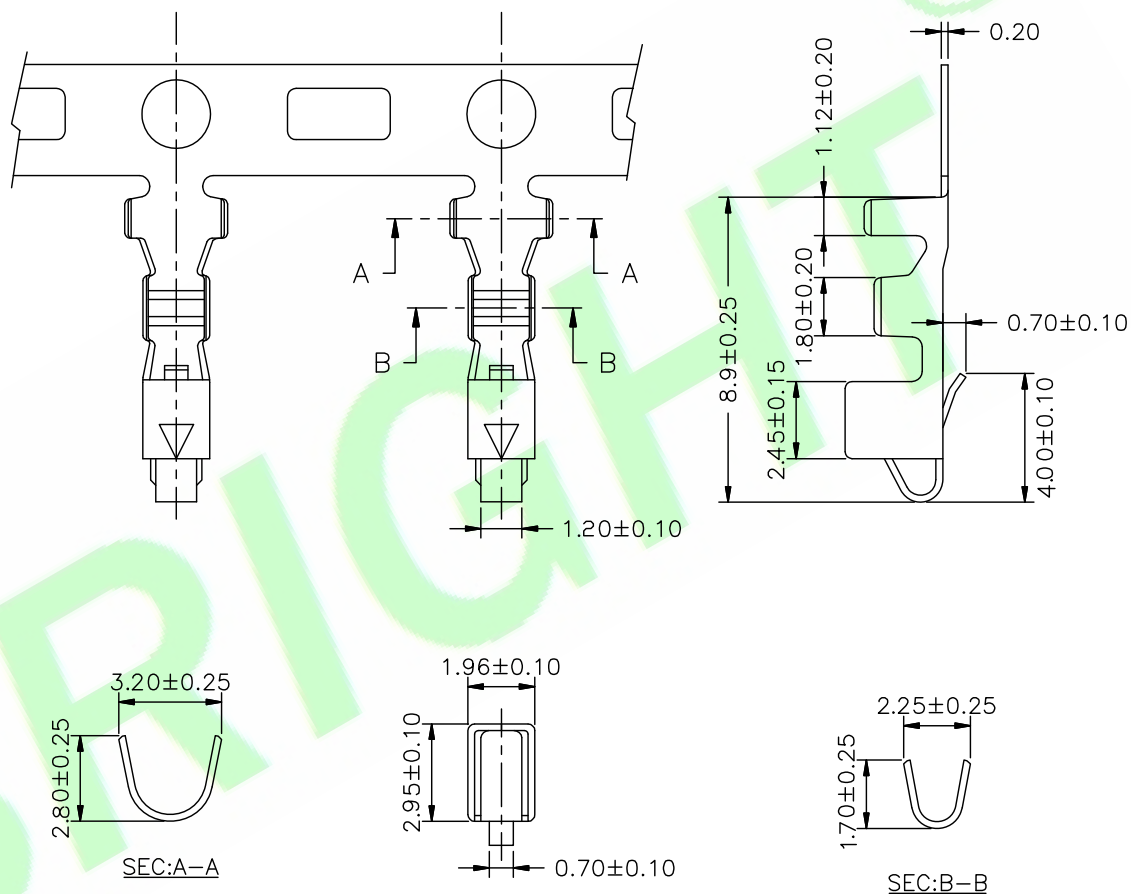


Ordering Information

H2513TF-PQ

1 23 4

- 1: — Series No.
2: — T: Terminal
3: — F: Female
4: — Q: Plated Tin

5X				DR.BY.: Samson	GENERAL TOLERANCE: LINEAR ANGLES X.: ± 0.30 X': $\pm 5.0^{\circ}$ X.X: ± 0.20 X.X': $\pm 3.0^{\circ}$ X.XX: ± 0.15 X.XX': $\pm 2.0^{\circ}$ X.XXX: ± 0.10 X.XXX': $\pm 1.0^{\circ}$	PART NO : H2513TF-PQ	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	SHEET: 1/1 SCALE: 1:1 UNIT: mm	 THIRD ANGLE PROJECTION	A4
4X				CHKD.: Tony		DWG. NO.:				
3X				APPD.: Billy		TITLE : 2.5mm Pitch Female Terminal				
2X	New code options	Judyyan	20220722			DATE: 23-Oct-2013				
1X	ORIGINAL	Samson								
REV.	DESCRIPTION	DR.BY	ECN. NO.							